
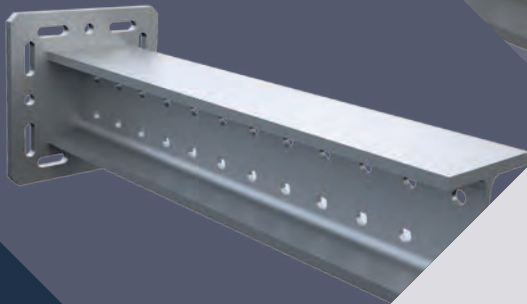
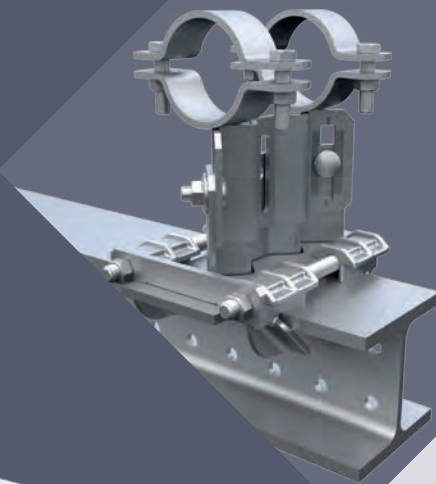


sikla

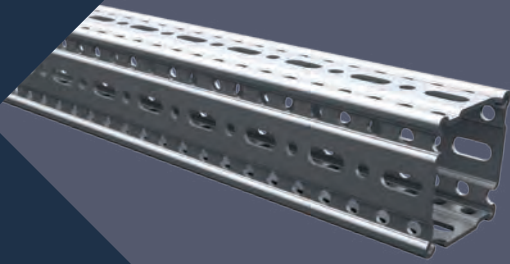

Simotec

Installation Guidelines

| | |
|--------------------------------|----------------|
| Notes | 2 |
| siFramo 80/30 | 3 - 6 |
| siFramo 80 | 7 - 14 |
| siFramo 100 | 15 - 22 |
| siFramo 100/160 | 23 - 32 |
| siFramo 100/160 combi | 33 - 35 |
| Structural Elements 100 | 36 - 38 |
| Structural Elements 120 | 39 - 41 |
| Supports (Pipe Shoes) | 42 - 44 |
| U-Bolt Supports | 45 - 46 |
| Rod Hangers | 47 - 48 |
| Technical Information | 49 - 54 |

Contacts

Sikla Austria Ges.m.b.H.
Kornstraße 4
A-4614 Marchtrenk

Telefon +43 (0) 7242 420 58 0
Telefax +43 (0) 7242 420 50
office@sikla.at

www.sikla.at

Sikla (Schweiz) AG
Udermülistrasse 26
CH-8320 Fehraltorf

Telefon +41 (0) 44 954 84 14
Telefax +41 (0) 44 954 84 24
info@sikla.ch

www.sikla.ch

Application

Sikla „Installation Guidelines“ is intended to provide guidance for supporting constructions within industrial pipework and plant engineering consisting of the Sikla Systems siFramo 80, siFramo 100, Beam System 100 and Beam System 120.

All CE marked systems are subject to the certified factory production control according to EN 1090 and may therefore be used to EXC 2 for load-bearing structures.

Basis of calculation

Eurocode 3 (DIN EN 1993) „Design of steel structures“ provides the basis for determining the load capacity. Regarding serviceability the specified restrictions are allocated separately according to the design of the individual constructions. These limits may also be specified differently by the client. All deformations are determined on the basis of characteristic loads ($\gamma_F = 1.0$). The values of the permissible loads comply simultaneously the ultimate limit state and the serviceability limit state design. The respective governing load is listed as $F_{z, perm}$ in the Installation Guideline.

Load effects

Specified are permissible vertical loads $F_{z, perm}$ in kN (e.g. pipeline weights), which have to be understood as maximum values of characteristic load effects and consider a safety factor $\gamma_F = 1.35$.

Some Sikla constructions take into account additional friction forces $F_x = F_z \cdot \mu_0$ for Sikla Pipe Shoes based on hot-dipped galvanized surface of Sikla beams which are calculated from pipe weight F_z and a friction coefficient $\mu_0 = 0.2$. These variable forces from pipe expansion are taken into account with a safety factor $\gamma_F = 1.5$. Sliding or guided Pipe Shoes (Sikla slide elements) with a higher coefficient $\mu_0 > 0.2$ (e.g. steel on steel) require an individual calculation.

Conditions

All loads are static loads at room temperature unless stated otherwise. Technical notes of the respective product data sheets for use and application range must be observed.

Load transmission into building structure

When fixing by anchors, or connection to existing cast-in channels, the structural safety analysis for the components used for this purpose must be done separately. When connecting to existing steel structures on site, resilience, support and torsional rigidity of the existing structure must be checked separately. In addition, when connecting with clamping sets, the static friction between clamping set and the on-site steel structure must fulfill the condition $\mu_0 \geq 0.2$ (Sliding Surfaces Class D). On-site steel structure sizes (flange widths) of ≥ 100 mm are considered by using clamps for connection points.

Unless shown otherwise: force direction $F_x =$ steel structure longitudinal axis.

Connections to concrete are designed with anchor type VMZ-A M12 (ETA-10/0260) in concrete strength C20/C25 under the design specifications $h_{std} \geq 2 h_{ef}$ edge distance $c \geq 120$ mm. Axis distances are determined by the components.

Reduction factor $\alpha_A = 0.7$ for structural steel flange sizes ≥ 201 mm for End Support WBD F80, F100 and F100/160.

Technical Information

Installation conditions are summarized at the end of this brochure - in particular specifications regarding tightening torques, bolt spacing, general installation instructions etc.

Recycleability of Products

Products must only be re-used if the recommended working loads have not been previously exceeded and if the coating has not been discernibly damaged.



General Remarks/ Disclaimer

This document is solely for being used by the receiver but remains property of Sikla. The technical drawings and all other content are to the best of our knowledge. Pictures and illustrations are non-committing. We can not be held responsible for printing errors and their implications. We reserve the right of making alterations and improvements without notice.

The present Guideline allows the user to select and to design supporting structures (constructions) easily. This document has been prepared in close cooperation with the following external specialists.

Working loads in accordance with Eurocode 3

Beam Section TP F 80/30



Single-span beam with uniaxial load
dead weight of the profile is considered

| Distributed Load | L_{max} | $q_{z, perm}$ | $F_z (q_z * L)$ |
|------------------|-----------|---------------|-----------------|
| | [mm] | [kN/m] | [kN] |
| | 500 | 27,80 | 13,90 |
| | 1000 | 5,44 | 5,44 |
| | 1500 | 1,61 | 2,42 |
| | 2000 | 0,68 | 1,36 |
| | 2500 | 0,35 | 0,87 |

q_z [kN/m] as permanent load over L.

| Point Load | L_{max} | $F_{z, perm}$ |
|------------|-----------|---------------|
| | [mm] | [kN] |
| | 500 | 9,13 |
| | 1000 | 3,40 |
| | 1500 | 1,51 |
| | 2000 | 0,85 |
| | 2500 | 0,54 |

F_z [kN] as a permanent load at L/2.

| 2 Point Loads | L_{max} | $F_{z, perm}$ |
|---------------|-----------|---------------|
| | [mm] | [kN] |
| | 500 | 6,85 |
| | 1000 | 1,99 |
| | 1500 | 0,89 |
| | 2000 | 0,50 |
| | 2500 | 0,32 |

F_z [kN] as permanent loads at L/3 and 2*L/3.


| 3 Point Loads | L_{max} | $F_{z, perm}$ |
|---------------|-----------|---------------|
| | [mm] | [kN] |
| | 500 | 4,56 |
| | 1000 | 1,43 |
| | 1500 | 0,64 |
| | 2000 | 0,36 |
| | 2500 | 0,23 |

F_z [kN] as permanent loads at L/4, L/2 and 3*L/4.

Max. bending L/200.

Working loads in accordance with Eurocode 3

L-Construction F 80 - 80/30

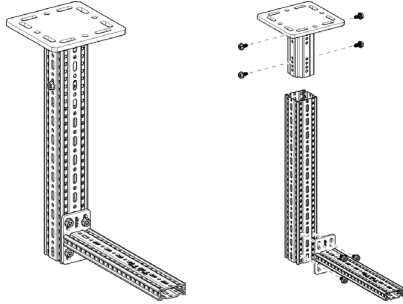

Part List

- 1 x End Support WBD F 80
- 1 x Beam Section TP F 80
- 1 x Cantilever Bracket AK F 80/30
- 8 x Self-Forming-Screw FLS F

| Distributed Load | L_{max} | 300 | | 500 | | 700 | |
|------------------|-----------|-------------|---------------|-----------------|---------------|-----------------|---------------|
| | | H_{max} | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ |
| | [mm] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] |
| | 500 | 7,14 | 2,14 | 2,47 | 1,23 | 1,16 | 0,81 |
| | 1000 | 6,05 | 1,82 | 2,14 | 1,07 | 1,02 | 0,71 |
| | 1500 | 5,25 | 1,57 | 1,89 | 0,94 | 0,91 | 0,64 |
| | 2000 | 4,63 | 1,39 | 1,69 | 0,84 | 0,82 | 0,57 |

q_z [kN/m] as permanent load over L.

| Point Load | L_{max} | 300 | | 500 | | 700 | |
|------------|-----------|-------------|-------------|-------------------------------------|-------------|-------------------------------------|-------------|
| | | H_{max} | $F_x = 0$ | $F_z, perm$ for $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_z, perm$ for $F_x = \mu_0 * F_z$ | $F_x = 0$ |
| | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 500 | 1,08 | 1,08 | 0,58 | 0,58 | 0,37 | 0,37 |
| | 1000 | 0,93 | 0,93 | 0,51 | 0,51 | 0,33 | 0,33 |
| | 1500 | 0,82 | 0,82 | 0,46 | 0,46 | 0,30 | 0,30 |
| | 2000 | 0,73 | 0,73 | 0,42 | 0,42 | 0,27 | 0,27 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

| 2 Point Loads | L_{max} | 300 | | 500 | | 700 | |
|---------------|-----------|-------------|-------------|-------------------------------------|-------------|-------------------------------------|-------------|
| | | H_{max} | $F_x = 0$ | $F_z, perm$ for $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_z, perm$ for $F_x = \mu_0 * F_z$ | $F_x = 0$ |
| | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 500 | 0,75 | 0,75 | 0,41 | 0,41 | 0,26 | 0,26 |
| | 1000 | 0,64 | 0,64 | 0,36 | 0,36 | 0,23 | 0,23 |
| | 1500 | 0,56 | 0,56 | 0,32 | 0,32 | 0,21 | 0,21 |
| | 2000 | 0,49 | 0,49 | 0,29 | 0,29 | 0,19 | 0,19 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.

| 3 Point Loads | L_{max} | 300 | | 500 | | 700 | |
|---------------|-----------|-------------|-------------|-------------------------------------|-------------|-------------------------------------|-------------|
| | | H_{max} | $F_x = 0$ | $F_z, perm$ for $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_z, perm$ for $F_x = \mu_0 * F_z$ | $F_x = 0$ |
| | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 500 | 0,56 | 0,56 | 0,31 | 0,31 | 0,20 | 0,20 |
| | 1000 | 0,48 | 0,48 | 0,27 | 0,27 | 0,18 | 0,18 |
| | 1500 | 0,42 | 0,42 | 0,24 | 0,24 | 0,16 | 0,16 |
| | 2000 | 0,37 | 0,37 | 0,22 | 0,22 | 0,14 | 0,14 |


F_z [kN] as permanent loads at distance L, 2*L/3 and L/3; F_x [kN] as variable loads at distance L, 2*L/3 and L/3.

All illustrated structures are able to be installed standing as well.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation $H/100$; $L/100$.

Working loads in accordance with Eurocode 3

Frame F 80 - 80/30

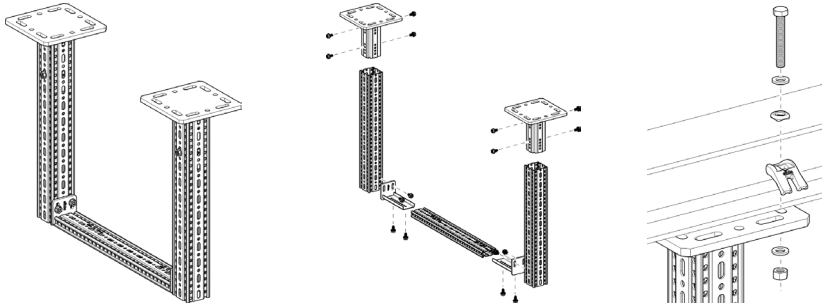

Part List

- 2 x End Support WBD F 80
- 2 x Beam Section TP F 80
- 1 x Beam Section TP F 80/30
- 2 x End Support STA F 80/30-E
- 16 x Self-Forming-Screw FLS F

| Distributed Load | | 500 | | 1000 | | 1500 | | 2000 | | 2500 | | 3000 | |
|------------------|------|--------------|-----------------|--------------|-----------------|--------------|-----------------|--------------|-----------------|--------------|-----------------|--------------|-----------------|
| | | $q_{z,perm}$ | $F_z (q_z * L)$ | $q_{z,perm}$ | $F_z (q_z * L)$ | $q_{z,perm}$ | $F_z (q_z * L)$ | $q_{z,perm}$ | $F_z (q_z * L)$ | $q_{z,perm}$ | $F_z (q_z * L)$ | $q_{z,perm}$ | $F_z (q_z * L)$ |
| H_{max} | [mm] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] |
| | 500 | 16,75 | 8,38 | 5,86 | 5,86 | 2,04 | 3,05 | 0,94 | 1,88 | 0,50 | 1,24 | 0,28 | 0,84 |
| | 1000 | 16,75 | 8,38 | 5,81 | 5,81 | 2,02 | 3,03 | 0,93 | 1,87 | 0,49 | 1,24 | 0,28 | 0,84 |
| | 1500 | 16,75 | 8,38 | 5,76 | 5,76 | 2,01 | 3,02 | 0,93 | 1,86 | 0,49 | 1,23 | 0,28 | 0,84 |
| | 2000 | 16,75 | 8,38 | 5,71 | 5,71 | 2,00 | 3,00 | 0,92 | 1,85 | 0,49 | 1,22 | 0,28 | 0,83 |

q_z [kN/m] as permanent load over L.

| Point Load | | 500 | | 1000 | | 1500 | | 2000 | | 2500 | | 3000 | |
|------------|------|----------------------------|---------------------|----------------------------|---------------------|----------------------------|---------------------|----------------------------|---------------------|----------------------------|---------------------|----------------------------|---------------------|
| | | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| H_{max} | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 500 | 8,32 | 6,95 | 3,72 | 3,50 | 1,90 | 1,79 | 1,15 | 1,08 | 0,77 | 0,72 | 0,51 | 0,48 |
| | 1000 | 8,32 | 6,95 | 3,70 | 3,48 | 1,89 | 1,78 | 1,15 | 1,08 | 0,76 | 0,72 | 0,51 | 0,48 |
| | 1500 | 8,32 | 5,70 | 3,68 | 3,46 | 1,88 | 1,77 | 1,14 | 1,08 | 0,76 | 0,72 | 0,51 | 0,48 |
| | 2000 | 8,32 | 3,85 | 3,65 | 3,44 | 1,87 | 1,76 | 1,14 | 1,07 | 0,76 | 0,71 | 0,51 | 0,48 |

F_z [kN] as a permanent load at distance L/2; F_x [kN] as a variable load at distance L/2.

| 2 Point Loads | | 500 | | 1000 | | 1500 | | 2000 | | 2500 | | 3000 | |
|---------------|------|----------------------------|---------------------|----------------------------|---------------------|----------------------------|---------------------|----------------------------|---------------------|----------------------------|---------------------|----------------------------|---------------------|
| | | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| H_{max} | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 500 | 4,17 | 3,48 | 2,20 | 2,07 | 1,13 | 1,06 | 0,69 | 0,65 | 0,46 | 0,43 | 0,30 | 0,28 |
| | 1000 | 4,17 | 3,48 | 2,19 | 2,06 | 1,12 | 1,06 | 0,68 | 0,64 | 0,45 | 0,43 | 0,30 | 0,28 |
| | 1500 | 4,17 | 2,85 | 2,17 | 2,04 | 1,12 | 1,05 | 0,68 | 0,64 | 0,45 | 0,42 | 0,30 | 0,28 |
| | 2000 | 4,17 | 1,93 | 2,16 | 1,91 | 1,11 | 1,04 | 0,68 | 0,64 | 0,45 | 0,42 | 0,30 | 0,28 |

F_z [kN] as permanent loads at distance 2*L/3 and L/3; F_x [kN] as variable loads at distance 2*L/3 and L/3.


| 3 Point Loads | | 500 | | 1000 | | 1500 | | 2000 | | 2500 | | 3000 | |
|---------------|------|----------------------------|---------------------|----------------------------|---------------------|----------------------------|---------------------|----------------------------|---------------------|----------------------------|---------------------|----------------------------|---------------------|
| | | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| H_{max} | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 500 | 2,78 | 2,32 | 1,56 | 1,47 | 0,80 | 0,75 | 0,49 | 0,46 | 0,32 | 0,30 | 0,21 | 0,20 |
| | 1000 | 2,78 | 2,32 | 1,55 | 1,46 | 0,79 | 0,75 | 0,49 | 0,46 | 0,31 | 0,30 | 0,21 | 0,20 |
| | 1500 | 2,78 | 1,90 | 1,54 | 1,45 | 0,79 | 0,74 | 0,49 | 0,46 | 0,31 | 0,29 | 0,21 | 0,19 |
| | 2000 | 2,78 | 1,29 | 1,53 | 1,27 | 0,79 | 0,74 | 0,48 | 0,46 | 0,31 | 0,29 | 0,21 | 0,19 |

F_z [kN] as permanent loads at distance 3*L/4, L/2 and L/4; F_x [kN] as variable loads at distance 3*L/4, L/4 and L/4.

All illustrated structures are able to be installed standing as well.
Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation H/100; L/200.


Working loads in accordance with Eurocode 3

Joining Beam Bracket F 80/30 horizontal

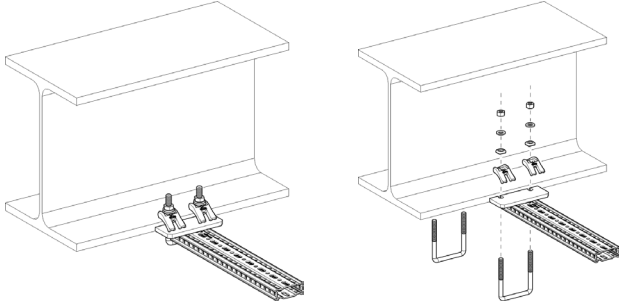

Part List
 1 x Beam Section TP F 80/30
 2 x U-Holder SB F 80/30-40


Distributed Load



| L_{max} | $q_{z, perm}$ | $F_z (q_{z, perm} * L)$ |
|-----------|---------------|-------------------------|
| [mm] | [kN/m] | [kN] |
| 300 | 10,62 | 3,19 |
| 500 | 3,68 | 1,84 |
| 700 | 1,84 | 1,29 |
| 900 | 1,09 | 0,98 |
| 1100 | 0,72 | 0,79 |

q_z [kN/m] as permanent load over L;
 $80 \text{ mm} < B < 200 \text{ mm}$.


Point Load



| L_{max} | $F_{z, perm}$ for | |
|-----------|-------------------|---------------------|
| | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| [mm] | [kN] | [kN] |
| 300 | 1,52 | 0,86 |
| 500 | 0,91 | 0,74 |
| 700 | 0,65 | 0,59 |
| 900 | 0,50 | 0,46 |
| 1100 | 0,35 | 0,35 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L;
 $80 \text{ mm} < B < 200 \text{ mm}$.


2 Point Loads



| L_{max} | $F_{z, perm}$ for | |
|-----------|-------------------|---------------------|
| | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| [mm] | [kN] | [kN] |
| 300 | 1,01 | 0,54 |
| 500 | 0,61 | 0,47 |
| 700 | 0,43 | 0,39 |
| 900 | 0,33 | 0,31 |
| 1100 | 0,27 | 0,25 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2;
 $80 \text{ mm} < B < 200 \text{ mm}$.

3 Point Loads





| L_{max} | $F_{z, perm}$ for | |
|-----------|-------------------|---------------------|
| | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| [mm] | [kN] | [kN] |
| 300 | 0,76 | 0,39 |
| 500 | 0,45 | 0,34 |
| 700 | 0,32 | 0,30 |
| 900 | 0,25 | 0,23 |
| 1100 | 0,20 | 0,19 |

F_z [kN] as permanent loads at distance L, $2*L/3$ and L/3; F_x [kN] as variable loads at distance L, $2*L/3$ and L/3; $80 \text{ mm} < B < 200 \text{ mm}$.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation L/100.

Working loads in accordance with Eurocode 3

Beam Section TP F 80



Single-span beam with uniaxial load
dead weight of the profile is considered

| Distributed Load | L_{max} | $q_{z, perm}$ | $F_z (q_{z, perm} \cdot L)$ |
|------------------|-----------|---------------|-----------------------------|
| | [mm] | [kN/m] | [kN] |
| | 1000 | 30,21 | 30,21 |
| | 1500 | 13,38 | 20,07 |
| | 2000 | 6,30 | 12,59 |
| | 2500 | 3,22 | 8,06 |
| | 3000 | 1,87 | 5,60 |
| | 3500 | 1,17 | 4,11 |

q_z [kN/m] as permanent load over L.

| Point Load | L_{max} | $F_{z, perm}$ |
|------------|-----------|---------------|
| | [mm] | [kN] |
| | 1000 | 15,10 |
| | 1500 | 10,04 |
| | 2000 | 7,49 |
| | 2500 | 5,04 |
| | 3000 | 3,50 |
| | 3500 | 2,57 |

F_z [kN] as a permanent load at distance L/2.

| 2 Point Loads | L_{max} | $F_{z, perm}$ |
|---------------|-----------|---------------|
| | [mm] | [kN] |
| | 1000 | 11,33 |
| | 1500 | 7,53 |
| | 2000 | 4,62 |
| | 2500 | 2,96 |
| | 3000 | 2,05 |
| | 3500 | 1,51 |

F_z [kN] as permanent loads at distance L/3 and 2*L/3.


| 3 Point Loads | L_{max} | $F_{z, perm}$ |
|---------------|-----------|---------------|
| | [mm] | [kN] |
| | 1000 | 7,55 |
| | 1500 | 5,02 |
| | 2000 | 3,31 |
| | 2500 | 2,12 |
| | 3000 | 1,47 |
| | 3500 | 1,08 |

F_z [kN] as permanent loads at distance L/4, L/2 and 3*L/4.

Max. bending L/200.

Working loads in accordance with Eurocode 3

L-Construction TP F 80

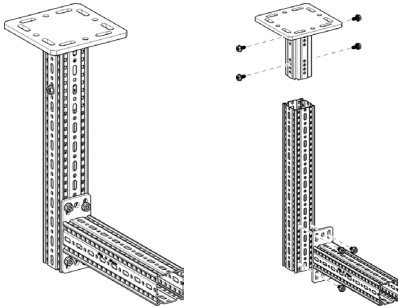

- Part List**
 1 x End Support WBD F 80
 1 x Beam Section TP F 80
 1 x Cantilever Bracket AK F 80
 8 x Self-Forming-Screw FLS F

| | L_{max} | 300 | | 500 | | 700 | |
|------|--------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|
| | | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ |
| [mm] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | |
| 500 | 10,42 | 3,13 | 4,07 | 2,03 | 2,10 | 1,47 | |
| 1000 | 8,25 | 2,47 | 3,25 | 1,62 | 1,69 | 1,18 | |
| 1500 | 6,82 | 2,05 | 2,70 | 1,35 | 1,40 | 0,98 | |
| 2000 | 5,81 | 1,74 | 2,31 | 1,15 | 1,20 | 0,84 | |

q_z [kN/m] as permanent load over L.

| | L_{max} | 300 | | 500 | | 700 | |
|------|-------------|-------------|---------------------|-------------|---------------------|-------------|---------------------|
| | | F_z | $F_x = \mu_0 * F_z$ | F_z | $F_x = \mu_0 * F_z$ | F_z | $F_x = \mu_0 * F_z$ |
| [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | |
| 500 | 1,70 | 1,70 | 1,06 | 1,06 | 0,75 | 0,75 | |
| 1000 | 1,36 | 1,36 | 0,85 | 0,85 | 0,60 | 0,60 | |
| 1500 | 1,13 | 1,13 | 0,71 | 0,71 | 0,50 | 0,50 | |
| 2000 | 0,96 | 0,96 | 0,61 | 0,61 | 0,43 | 0,43 | |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

| | L_{max} | 300 | | 500 | | 700 | |
|------|-------------|-------------|---------------------|-------------|---------------------|-------------|---------------------|
| | | F_z | $F_x = \mu_0 * F_z$ | F_z | $F_x = \mu_0 * F_z$ | F_z | $F_x = \mu_0 * F_z$ |
| [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | |
| 500 | 1,11 | 1,11 | 0,70 | 0,70 | 0,50 | 0,50 | |
| 1000 | 0,88 | 0,88 | 0,56 | 0,56 | 0,40 | 0,40 | |
| 1500 | 0,73 | 0,73 | 0,47 | 0,47 | 0,34 | 0,34 | |
| 2000 | 0,63 | 0,63 | 0,40 | 0,40 | 0,29 | 0,29 | |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.


| | L_{max} | 300 | | 500 | | 700 | |
|------|-------------|-------------|---------------------|-------------|---------------------|-------------|---------------------|
| | | F_z | $F_x = \mu_0 * F_z$ | F_z | $F_x = \mu_0 * F_z$ | F_z | $F_x = \mu_0 * F_z$ |
| [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | |
| 500 | 0,82 | 0,82 | 0,52 | 0,52 | 0,37 | 0,37 | |
| 1000 | 0,65 | 0,65 | 0,41 | 0,41 | 0,30 | 0,30 | |
| 1500 | 0,54 | 0,54 | 0,35 | 0,35 | 0,25 | 0,25 | |
| 2000 | 0,46 | 0,46 | 0,30 | 0,30 | 0,21 | 0,21 | |

F_z [kN] as permanent loads at distance L, 2*L/3 and L/3; F_x [kN] as variable loads at distance L, 2*L/3 and L/3.

All illustrated structures are able to be installed standing as well.
 Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation $H/100$; $L/100$.

Working loads in accordance with Eurocode 3

T-Support F 80

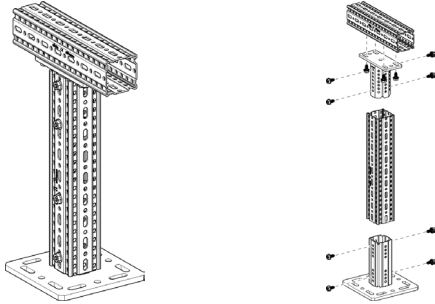

Part List

- 1 x End Support WBD F 80
- 2 x Beam Section TP F 80
- 1 x End Support STA F 80
- 12 x Self-Forming-Screw FLS F

| Distributed Load - symmetrical | H_{max} | $q_z, perm$ | $F_z (q_z, perm \times 1m)$ |
|--------------------------------|-----------|--------------|-----------------------------|
| | [mm] | [kN/m] | [kN] |
| | 500 | 13,19 | 13,19 |
| | 1000 | 13,15 | 13,15 |
| | 1500 | 13,12 | 13,12 |
| | 2000 | 13,08 | 13,08 |

q_z [kN/m] as permanent load over L; $L_{max} = 1.100$ mm.

| Point Load - central | H_{max} | $F_z, perm$ for | |
|----------------------|-----------|-----------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 500 | 11,53 | 8,78 |
| | 1000 | 11,50 | 3,65 |
| | 1500 | 10,63 | 2,10 |
| | 2000 | 9,15 | 1,41 |

F_z [kN] as a permanent load; F_x [kN] as a variable load; central load introduction for planned eccentricity ± 50 mm.

| 2 Point Loads - symmetrical | H_{max} | $F_z, perm$ for | |
|-----------------------------|-----------|-----------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 500 | 6,46 | 4,32 |
| | 1000 | 6,46 | 1,88 |
| | 1500 | 6,46 | 1,07 |
| | 2000 | 6,46 | 0,71 |

F_z [kN] as permanent loads; F_x [kN] as variable loads; $L_{max} = 1.100$ mm.


| 3 Point Loads - symmetrical | H_{max} | $F_z, perm$ for | |
|-----------------------------|-----------|-----------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 500 | 4,39 | 3,16 |
| | 1000 | 4,38 | 1,25 |
| | 1500 | 4,37 | 0,71 |
| | 2000 | 4,36 | 0,47 |

F_z [kN] as permanent loads; F_x [kN] as variable loads; $L_{max} = 1.100$ mm.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation $H/150$.

Working loads in accordance with Eurocode 3

Frame F 80

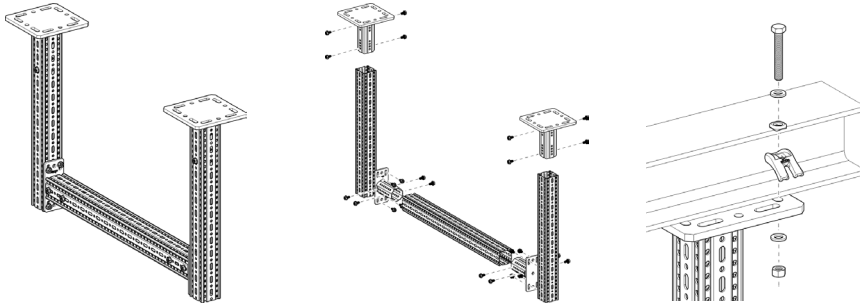

Part List

- 2 x End Support WBD F 80
- 3 x Beam Section TP F 80
- 2 x End Support STA F 80
- 24 x Self-Forming-Screw FLS

| Distributed Load | | L_{max} | | 500 | | 1000 | | 1500 | | 2000 | | 2500 | | 3000 | |
|------------------|--------------|--------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|
| | | H_{max} | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ |
| [mm] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN] |
| 1000 | 39,47 | 19,37 | 19,37 | 19,37 | 19,37 | 12,56 | 18,85 | 6,76 | 13,52 | 3,89 | 9,71 | 2,43 | 7,30 | | |
| 1500 | 39,47 | 19,37 | 19,37 | 19,37 | 19,37 | 12,66 | 18,99 | 6,65 | 13,29 | 3,82 | 9,55 | 2,39 | 7,18 | | |
| 2000 | 39,47 | 19,37 | 19,37 | 19,37 | 19,37 | 12,56 | 18,83 | 6,55 | 13,09 | 3,76 | 9,41 | 2,36 | 7,07 | | |
| 2500 | 39,47 | 19,37 | 19,37 | 19,37 | 19,37 | 12,43 | 18,64 | 6,46 | 12,91 | 3,71 | 9,28 | 2,32 | 6,97 | | |
| 3000 | 39,47 | 19,37 | 19,37 | 19,37 | 19,37 | 12,27 | 18,40 | 6,38 | 12,75 | 3,67 | 9,16 | 2,29 | 6,88 | | |

q_z [kN/m] as permanent load over L.

| Point Load | | L_{max} | | 500 | | 1000 | | 1500 | | 2000 | | 2500 | | 3000 | |
|------------|--------------|-------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|
| | | H_{max} | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ |
| [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| 1000 | 19,67 | 9,02 | 16,21 | 8,76 | 11,21 | 8,18 | 8,63 | 6,56 | 6,08 | 5,38 | 4,52 | 4,25 | | | |
| 1500 | 19,67 | 5,49 | 16,13 | 5,42 | 11,15 | 5,26 | 8,51 | 5,00 | 5,99 | 4,63 | 4,45 | 4,18 | | | |
| 2000 | 19,67 | 3,74 | 16,04 | 3,72 | 11,09 | 3,66 | 8,40 | 3,56 | 5,92 | 3,41 | 4,39 | 3,22 | | | |
| 2500 | 19,67 | 2,74 | 15,96 | 2,73 | 11,04 | 2,70 | 8,31 | 2,65 | 5,85 | 2,59 | 4,34 | 2,49 | | | |
| 3000 | 19,67 | 2,09 | 15,89 | 2,09 | 10,98 | 2,08 | 8,22 | 2,05 | 5,78 | 2,02 | 4,29 | 1,97 | | | |

F_z [kN] as a permanent load at distance L/2; F_x [kN] as a variable load at distance L/2.

| 2 Point Loads | | L_{max} | | 500 | | 1000 | | 1500 | | 2000 | | 2500 | | 3000 | |
|---------------|-------------|-------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|
| | | H_{max} | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ |
| [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| 1000 | 9,85 | 4,52 | 9,60 | 4,40 | 7,61 | 4,15 | 5,10 | 3,76 | 3,61 | 3,27 | 2,69 | 2,53 | | | |
| 1500 | 9,85 | 2,75 | 9,60 | 2,72 | 7,49 | 2,65 | 5,02 | 2,53 | 3,55 | 2,37 | 2,65 | 2,17 | | | |
| 2000 | 9,85 | 1,87 | 9,60 | 1,86 | 7,38 | 1,84 | 4,95 | 1,79 | 3,51 | 1,73 | 2,61 | 1,64 | | | |
| 2500 | 9,85 | 1,37 | 9,60 | 1,36 | 7,29 | 1,35 | 4,89 | 1,33 | 3,46 | 1,30 | 2,58 | 1,26 | | | |
| 3000 | 9,85 | 1,05 | 9,60 | 1,04 | 7,20 | 1,04 | 4,83 | 1,03 | 3,42 | 1,01 | 2,55 | 0,99 | | | |

F_z [kN] as permanent loads at distance $2 * L/3$ and $L/3$; F_x [kN] as variable loads at distance $2 * L/3$ and $L/3$.

| 3 Point Loads | | L_{max} | | 500 | | 1000 | | 1500 | | 2000 | | 2500 | | 3000 | |
|---------------|-------------|-------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|
| | | H_{max} | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ |
| [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| 1000 | 6,57 | 3,01 | 6,42 | 2,94 | 5,37 | 2,78 | 3,63 | 2,54 | 2,58 | 2,22 | 1,93 | 1,81 | | | |
| 1500 | 6,57 | 1,83 | 6,42 | 1,81 | 5,29 | 1,77 | 3,57 | 1,70 | 2,54 | 1,60 | 1,90 | 1,47 | | | |
| 2000 | 6,57 | 1,25 | 6,42 | 1,24 | 5,21 | 1,23 | 3,52 | 1,20 | 2,50 | 1,16 | 1,87 | 1,10 | | | |
| 2500 | 6,57 | 0,91 | 6,42 | 0,91 | 5,14 | 0,90 | 3,48 | 0,89 | 2,47 | 0,87 | 1,85 | 0,85 | | | |
| 3000 | 6,57 | 0,70 | 6,42 | 0,70 | 5,08 | 0,69 | 3,44 | 0,69 | 2,44 | 0,68 | 1,82 | 0,66 | | | |


F_z [kN] as permanent loads at distance $3 * L/4$, $L/2$ and $L/4$; F_x [kN] as variable loads at distance $3 * L/4$, $L/4$ and $L/4$.

All illustrated structures are able to be installed standing as well.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation $H/100$; $L/200$.

Working loads in accordance with Eurocode 3

Joining Beam Bracket F 80 horizontal

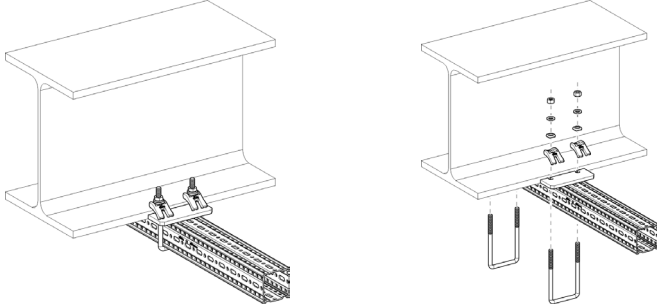

Part List

- 1 x Beam Section TP F 80
- 2 x U-Holder SB F 80-40

| Distributed Load | | B | | 100 | | 150 | | 200 | | 250 | | 300 | |
|------------------|------|--------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|
| | | L_{max} | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ |
| | [mm] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] |
| | 300 | 14,39 | 4,32 | 20,42 | 6,13 | 24,82 | 7,45 | 28,17 | 8,45 | 30,72 | 9,22 | | |
| | 500 | 5,64 | 2,82 | 8,38 | 4,19 | 10,53 | 5,26 | 12,27 | 6,13 | 12,28 | 6,14 | | |
| | 700 | 3,02 | 2,12 | 4,62 | 3,23 | 5,93 | 4,15 | 6,19 | 4,34 | 6,19 | 4,34 | | |
| | 900 | 1,88 | 1,69 | 2,93 | 2,64 | 3,72 | 3,35 | 3,72 | 3,35 | 3,72 | 3,35 | | |
| | 1100 | 1,28 | 1,41 | 2,02 | 2,22 | 2,47 | 2,72 | 2,47 | 2,72 | 2,47 | 2,72 | | |

q_z [kN/m] as permanent load over L.

| Point Load | | B | | 100 | | 150 | | 200 | | 250 | | 300 | |
|------------|------|-------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|
| | | L_{max} | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ |
| | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 300 | 2,36 | 1,12 | 3,51 | 1,67 | 4,43 | 2,10 | 5,04 | 2,45 | 5,04 | 2,75 | | |
| | 500 | 1,55 | 0,74 | 2,41 | 1,14 | 3,02 | 1,49 | 3,02 | 1,79 | 3,02 | 2,05 | | |
| | 700 | 1,16 | 0,55 | 1,83 | 0,87 | 2,16 | 1,15 | 2,16 | 1,41 | 2,16 | 1,63 | | |
| | 900 | 0,92 | 0,44 | 1,48 | 0,70 | 1,68 | 0,94 | 1,68 | 1,16 | 1,68 | 1,36 | | |
| | 1100 | 0,77 | 0,36 | 1,24 | 0,59 | 1,37 | 0,79 | 1,37 | 0,99 | 1,37 | 1,16 | | |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

| 2 Point Loads | | B | | 100 | | 150 | | 200 | | 250 | | 300 | |
|---------------|------|-------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|
| | | L_{max} | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ |
| | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 300 | 1,46 | 0,69 | 2,12 | 1,01 | 2,62 | 1,24 | 3,01 | 1,43 | 3,32 | 1,57 | | |
| | 500 | 0,98 | 0,47 | 1,50 | 0,71 | 1,92 | 0,91 | 2,01 | 1,08 | 2,01 | 1,22 | | |
| | 700 | 0,74 | 0,35 | 1,16 | 0,55 | 1,44 | 0,72 | 1,44 | 0,86 | 1,44 | 0,99 | | |
| | 900 | 0,60 | 0,28 | 0,94 | 0,45 | 1,12 | 0,59 | 1,12 | 0,72 | 1,12 | 0,84 | | |
| | 1100 | 0,50 | 0,24 | 0,79 | 0,38 | 0,91 | 0,50 | 0,91 | 0,62 | 0,91 | 0,72 | | |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.


| 3 Point Loads | | B | | 100 | | 150 | | 200 | | 250 | | 300 | |
|---------------|------|-------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|
| | | L_{max} | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ |
| | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 300 | 1,06 | 0,50 | 1,52 | 0,72 | 1,86 | 0,88 | 2,12 | 1,00 | 2,33 | 1,10 | | |
| | 500 | 0,72 | 0,34 | 1,08 | 0,52 | 1,38 | 0,65 | 1,51 | 0,77 | 1,51 | 0,87 | | |
| | 700 | 0,55 | 0,26 | 0,84 | 0,40 | 1,08 | 0,52 | 1,08 | 0,62 | 1,08 | 0,71 | | |
| | 900 | 0,44 | 0,21 | 0,69 | 0,33 | 0,84 | 0,43 | 0,84 | 0,52 | 0,84 | 0,61 | | |
| | 1100 | 0,37 | 0,18 | 0,58 | 0,28 | 0,68 | 0,37 | 0,68 | 0,45 | 0,68 | 0,53 | | |

F_z [kN] as permanent loads at distance L, 2*L/3 and L/3; F_x [kN] as variable loads at distance L, 2*L/3 and L/3.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation L/100.

Working loads in accordance with Eurocode 3

Joining Beam Bracket F 80 vertical

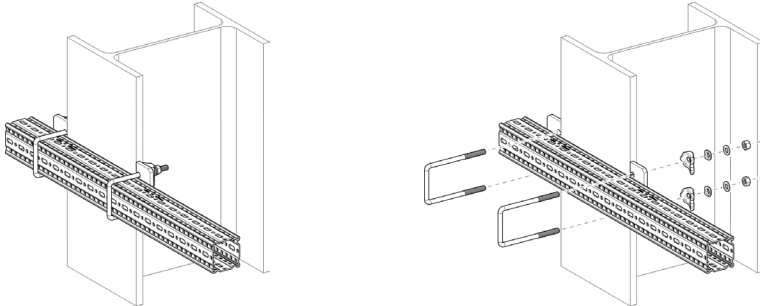

Part List
 1 x Beam Section TP F 80
 2 x U-Holder SB F 80-40

| Distributed Load | | B | | 100 | | 150 | | 200 | | 250 | | 300 | |
|------------------|------|-------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|
| | | L_{max} | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ |
| | [mm] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] |
| 300 | | 3,21 | 0,96 | 4,46 | 1,34 | 5,34 | 1,60 | 5,99 | 1,80 | 6,49 | 1,95 | | |
| 500 | | 1,36 | 0,68 | 1,98 | 0,99 | 2,47 | 1,23 | 2,86 | 1,43 | 3,17 | 1,58 | | |
| 700 | | 0,75 | 0,52 | 1,13 | 0,79 | 1,44 | 1,00 | 1,69 | 1,18 | 1,91 | 1,34 | | |
| 900 | | 0,47 | 0,43 | 0,73 | 0,65 | 0,94 | 0,85 | 1,12 | 1,01 | 1,28 | 1,15 | | |
| 1100 | | 0,33 | 0,36 | 0,51 | 0,56 | 0,67 | 0,73 | 0,80 | 0,88 | 0,92 | 1,02 | | |

q_z [kN/m] as permanent load over L.

| Point Load | | B | | 100 | | 150 | | 200 | | 250 | | 300 | |
|------------|------|-------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|
| | | L_{max} | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ |
| | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| 300 | | 0,59 | 0,56 | 0,88 | 0,84 | 1,11 | 1,06 | 1,29 | 1,24 | 1,45 | 1,39 | | |
| 500 | | 0,39 | 0,37 | 0,60 | 0,58 | 0,79 | 0,75 | 0,94 | 0,90 | 1,08 | 1,03 | | |
| 700 | | 0,29 | 0,28 | 0,46 | 0,44 | 0,61 | 0,58 | 0,74 | 0,71 | 0,86 | 0,83 | | |
| 900 | | 0,23 | 0,22 | 0,37 | 0,35 | 0,50 | 0,48 | 0,61 | 0,59 | 0,72 | 0,69 | | |
| 1100 | | 0,19 | 0,18 | 0,31 | 0,30 | 0,42 | 0,40 | 0,52 | 0,50 | 0,61 | 0,59 | | |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

| 2 Point Loads | | B | | 100 | | 150 | | 200 | | 250 | | 300 | |
|---------------|------|-------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|
| | | L_{max} | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ |
| | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| 300 | | 0,37 | 0,35 | 0,53 | 0,51 | 0,65 | 0,63 | 0,75 | 0,72 | 0,83 | 0,80 | | |
| 500 | | 0,25 | 0,24 | 0,37 | 0,36 | 0,48 | 0,46 | 0,57 | 0,54 | 0,64 | 0,62 | | |
| 700 | | 0,19 | 0,18 | 0,29 | 0,28 | 0,38 | 0,36 | 0,46 | 0,44 | 0,52 | 0,50 | | |
| 900 | | 0,15 | 0,14 | 0,24 | 0,23 | 0,31 | 0,30 | 0,38 | 0,36 | 0,44 | 0,42 | | |
| 1100 | | 0,13 | 0,12 | 0,20 | 0,19 | 0,27 | 0,26 | 0,33 | 0,31 | 0,38 | 0,37 | | |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.



| 3 Point Loads | | B | | 100 | | 150 | | 200 | | 250 | | 300 | |
|---------------|------|-------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|
| | | L_{max} | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ |
| | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| 300 | | 0,27 | 0,25 | 0,38 | 0,36 | 0,46 | 0,45 | 0,53 | 0,51 | 0,58 | 0,56 | | |
| 500 | | 0,18 | 0,17 | 0,27 | 0,26 | 0,35 | 0,33 | 0,41 | 0,39 | 0,46 | 0,44 | | |
| 700 | | 0,14 | 0,13 | 0,21 | 0,20 | 0,28 | 0,26 | 0,33 | 0,32 | 0,38 | 0,36 | | |
| 900 | | 0,11 | 0,11 | 0,17 | 0,17 | 0,23 | 0,22 | 0,28 | 0,27 | 0,32 | 0,31 | | |
| 1100 | | 0,09 | 0,09 | 0,15 | 0,14 | 0,20 | 0,19 | 0,24 | 0,23 | 0,28 | 0,27 | | |

F_z [kN] as permanent loads at distance L, 2*L/3 and L/3; F_x [kN] as variable loads at distance L, 2*L/3 and L/3.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation L/100.


Working loads in accordance with Eurocode 3

Beam Bracket F 80 - Variante a) clamped

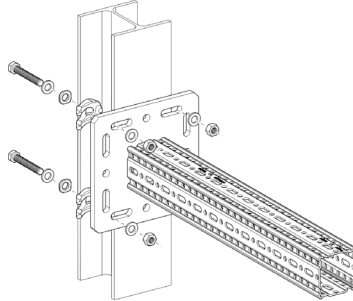


Part List


- 1 x Beam Bracket TKO F 80
- 1 x Assembly Set MS 5P M12 S

| Distributed Load  | L_{max} | $q_{z, perm}$ | $F_z (q_{z, perm} * L)$ |
|--|-----------|---------------|-------------------------|
| | [mm] | [kN/m] | [kN] |
| | 300 | 54,99 | 16,50 |
| | 500 | 28,59 | 14,30 |
| | 700 | 14,59 | 10,21 |


q_z [kN/m] as permanent load over L.

| Point Load  | L_{max} | $F_{z, perm}$ for | |
|--|-----------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 300 | 11,91 | 7,40 |
| | 500 | 7,15 | 4,44 |
| | 700 | 5,04 | 3,17 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

| 2 Point Loads  | L_{max} | $F_{z, perm}$ for | |
|---|-----------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 300 | 7,94 | 4,93 |
| | 500 | 4,77 | 2,96 |
| | 700 | 3,40 | 2,11 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.


| 3 Point Loads  | L_{max} | $F_{z, perm}$ for | |
|---|-----------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 300 | 5,96 | 3,70 |
| | 500 | 3,57 | 2,22 |
| | 700 | 2,55 | 1,58 |

F_z [kN] as permanent loads at distance L, $2 * L/3$ and $L/3$;
 F_x [kN] as variable loads at distance L, $2 * L/3$ and $L/3$.



Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation $L/100$.

Working loads in accordance with Eurocode 3


Beam Bracket F 80 - Variante b) anchored

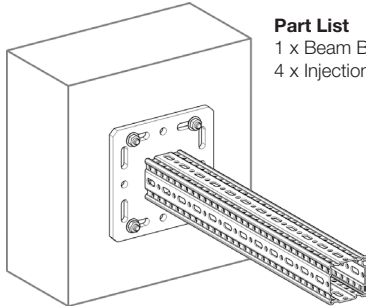

Part List
 1 x Beam Bracket TKO F 80
 4 x Injection system VMZ-A (M12/125)

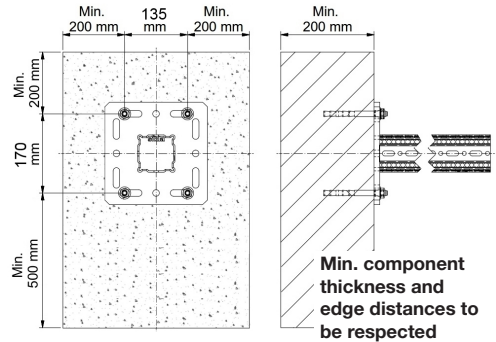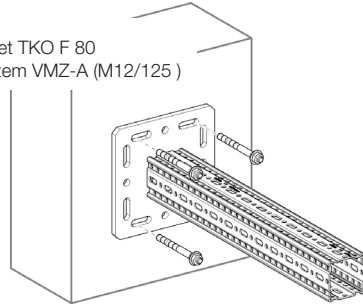


Distributed Load



| L_{max} | $q_{z, perm}$ | $F_z (q_{z, perm} * L)$ |
|-----------|---------------|-------------------------|
| [mm] | [kN/m] | [kN] |
| 300 | 42,31 | 12,69 |
| 500 | 21,76 | 10,88 |
| 700 | 13,61 | 9,52 |

q_z [kN/m] as permanent load at distance L.


Point Load



| L_{max} | $F_{z, perm}$ for | |
|-----------|-------------------|---------------------|
| | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| [mm] | [kN] | [kN] |
| 300 | 10,16 | 10,16 |
| 500 | 7,37 | 7,37 |
| 700 | 4,44 | 4,44 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.


2 Point Loads



| L_{max} | $F_{z, perm}$ for | |
|-----------|-------------------|---------------------|
| | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| [mm] | [kN] | [kN] |
| 300 | 5,64 | 5,64 |
| 500 | 4,62 | 4,62 |
| 700 | 3,18 | 3,18 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.

3 Point Loads





| L_{max} | $F_{z, perm}$ for | |
|-----------|-------------------|---------------------|
| | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| [mm] | [kN] | [kN] |
| 300 | 3,91 | 3,91 |
| 500 | 3,24 | 3,24 |
| 700 | 2,44 | 2,44 |

F_z [kN] as permanent loads at distance L, 2*L/3 and L/3;
 F_x [kN] as variable loads at distance L, 2*L/3 and L/3.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation $L/100$.

Working loads in accordance with Eurocode 3

Beam Section TP F 100



Single-span beam with uniaxial load
dead weight of the profile is considered

| Distributed Load | L_{max} | $q_{z, perm}$ | $F_z (q_{z, perm} * L)$ |
|------------------|-----------|---------------|-------------------------|
| | [mm] | [kN/m] | [kN] |
| | 1000 | 70,50 | 70,50 |
| | 2000 | 17,53 | 35,06 |
| | 3000 | 5,37 | 16,11 |
| | 4000 | 2,27 | 9,06 |
| | 5000 | 1,16 | 5,80 |
| | 6000 | 0,67 | 4,03 |

q_z [kN/m] as permanent load over L.

| Point Load | L_{max} | $F_{z, perm}$ |
|------------|-----------|---------------|
| | [mm] | [kN] |
| | 1000 | 35,30 |
| | 2000 | 17,50 |
| | 3000 | 10,10 |
| | 4000 | 5,70 |
| | 5000 | 3,60 |
| | 6000 | 2,50 |

F_z [kN] as a permanent load at L/2.

| 2 Point Loads | L_{max} | $F_{z, perm}$ |
|---------------|-----------|---------------|
| | [mm] | [kN] |
| | 1000 | 26,40 |
| | 2000 | 13,10 |
| | 3000 | 5,90 |
| | 4000 | 3,30 |
| | 5000 | 2,10 |
| | 6000 | 1,50 |

F_z [kN] as permanent loads at L/3 and 2*L/3.


| 3 Point Loads | L_{max} | $F_{z, perm}$ |
|---------------|-----------|---------------|
| | [mm] | [kN] |
| | 1000 | 17,60 |
| | 2000 | 8,80 |
| | 3000 | 4,20 |
| | 4000 | 2,40 |
| | 5000 | 1,50 |
| | 6000 | 1,10 |

F_z [kN] as permanent loads at L/4, L/2 and 3*L/4.

Max. bending L/200.

Working loads in accordance with Eurocode 3

L-Construction F 100

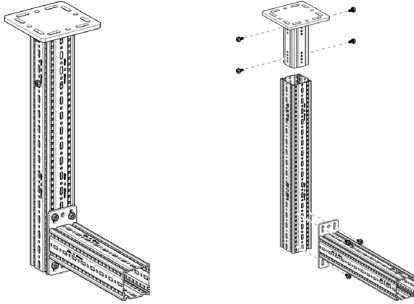

- Part List**
 1 x End Support WBD F 100
 1 x Beam Section TP F 100
 1 x Cantilever Bracket AK F 100
 8 x Self-Forming-Screw FLS F

| Distributed Load | H_{max} [mm] | 300 | | 500 | | 700 | | 900 | | 1100 | |
|------------------|-------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | | $q_{z, perm}$ [kN/m] | $F_z (q_z * L)$ [kN] | $q_{z, perm}$ [kN/m] | $F_z (q_z * L)$ [kN] | $q_{z, perm}$ [kN/m] | $F_z (q_z * L)$ [kN] | $q_{z, perm}$ [kN/m] | $F_z (q_z * L)$ [kN] | $q_{z, perm}$ [kN/m] | $F_z (q_z * L)$ [kN] |
| | 1000 | 18,91 | 5,67 | 7,70 | 3,85 | 4,08 | 2,86 | 2,48 | 2,24 | 1,65 | 1,81 |
| | 1500 | 16,01 | 4,80 | 6,55 | 3,28 | 3,48 | 2,44 | 2,12 | 1,91 | 1,40 | 1,55 |
| | 2000 | 13,88 | 4,16 | 5,70 | 2,85 | 3,03 | 2,12 | 1,85 | 1,66 | 1,22 | 1,34 |
| | 2500 | 12,25 | 3,67 | 5,04 | 2,52 | 2,68 | 1,88 | 1,63 | 1,47 | 1,08 | 1,18 |

q_z [kN/m] as permanent load over L.

| Point Load | H_{max} [mm] | 300 | | 500 | | 700 | | 900 | | 1100 | |
|------------|-------------------|-------------------|-----------------------------|-------------------|-----------------------------|-------------------|-----------------------------|-------------------|-----------------------------|-------------------|-----------------------------|
| | | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| | 1000 | 3,20 | 3,20 | 2,05 | 2,05 | 1,48 | 1,48 | 1,14 | 1,14 | 0,91 | 0,91 |
| | 1500 | 2,72 | 2,72 | 1,75 | 1,75 | 1,27 | 1,27 | 0,98 | 0,98 | 0,78 | 0,78 |
| | 2000 | 2,37 | 2,37 | 1,53 | 1,53 | 1,11 | 1,11 | 0,85 | 0,85 | 0,68 | 0,68 |
| | 2500 | 2,09 | 2,09 | 1,36 | 1,36 | 0,98 | 0,98 | 0,76 | 0,76 | 0,60 | 0,60 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

| 2 Point Loads | H_{max} [mm] | 300 | | 500 | | 700 | | 900 | | 1100 | |
|---------------|-------------------|-------------------|-----------------------------|-------------------|-----------------------------|-------------------|-----------------------------|-------------------|-----------------------------|-------------------|-----------------------------|
| | | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| | 1000 | 2,07 | 2,03 | 1,35 | 1,35 | 0,98 | 0,98 | 0,76 | 0,76 | 0,61 | 0,61 |
| | 1500 | 1,75 | 1,75 | 1,15 | 1,15 | 0,84 | 0,84 | 0,65 | 0,65 | 0,52 | 0,52 |
| | 2000 | 1,52 | 1,52 | 1,00 | 1,00 | 0,73 | 0,73 | 0,57 | 0,57 | 0,46 | 0,46 |
| | 2500 | 1,35 | 1,35 | 0,89 | 0,89 | 0,65 | 0,65 | 0,50 | 0,50 | 0,40 | 0,40 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.

| 3 Point Loads | H_{max} [mm] | 300 | | 500 | | 700 | | 900 | | 1100 | |
|---------------|-------------------|-------------------|-----------------------------|-------------------|-----------------------------|-------------------|-----------------------------|-------------------|-----------------------------|-------------------|-----------------------------|
| | | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| | 1000 | 1,51 | 1,44 | 0,99 | 0,99 | 0,73 | 0,73 | 0,56 | 0,56 | 0,45 | 0,45 |
| | 1500 | 1,28 | 1,27 | 0,85 | 0,85 | 0,62 | 0,62 | 0,48 | 0,48 | 0,39 | 0,39 |
| | 2000 | 1,12 | 1,12 | 0,74 | 0,74 | 0,54 | 0,54 | 0,42 | 0,42 | 0,34 | 0,34 |
| | 2500 | 0,99 | 0,99 | 0,65 | 0,65 | 0,48 | 0,48 | 0,37 | 0,37 | 0,30 | 0,30 |


F_z [kN] as permanent loads at distance L, 2*L/3 and L/3; F_x [kN] as variable loads at distance L, 2*L/3 and L/3.

All illustrated structures are able to be installed standing as well.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation $H/100$; $L/100$.

Working loads in accordance with Eurocode 3

T-Support F 100

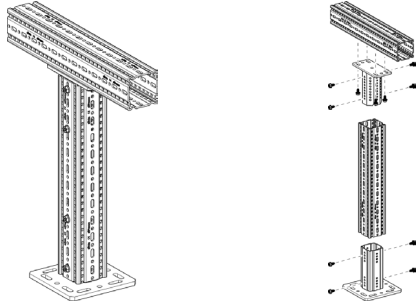

Part List

- 1 x End Support WBD F 100
- 2 x Beam Section TP F 100
- 1 x End Support STA F 100
- 12 x Self-Forming-Screw FLS F

| Distributed Load - symmetrical | H_{max} | $q_{z,perm}$ | $F_z (q_{z,perm} * 1m)$ |
|--------------------------------|-----------|--------------|-------------------------|
| | [mm] | [kN/m] | [kN] |
| | 1000 | 13,98 | 13,98 |
| | 1500 | 13,92 | 13,92 |
| | 2000 | 13,86 | 13,86 |
| | 2500 | 13,80 | 13,80 |

q_z [kN/m] as permanent load over L;
 $L_{max} = 1.100$ mm.

| Point Load - central | H_{max} | $F_{z,perm}$ for | |
|----------------------|-----------|------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 1000 | 12,85 | 7,68 |
| | 1500 | 12,80 | 4,53 |
| | 2000 | 12,74 | 3,07 |
| | 2500 | 12,69 | 2,24 |

F_z [kN] as a permanent load; F_x [kN] as a variable load;
 Central load introduction for planned eccentricity ± 50 mm.

| 2 Point Loads - symmetrical | H_{max} | $F_{z,perm}$ for | |
|-----------------------------|-----------|------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 1000 | 6,98 | 4,36 |
| | 1500 | 6,95 | 2,53 |
| | 2000 | 6,92 | 1,70 |
| | 2500 | 6,89 | 1,24 |

F_z [kN] as permanent loads; F_x [kN] as variable loads;
 $L_{max} = 1.100$ mm.


| 3 Point Loads - symmetrical | H_{max} | $F_{z,perm}$ for | |
|-----------------------------|-----------|------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN/m] | [kN] |
| | 1000 | 4,65 | 2,91 |
| | 1500 | 4,63 | 1,69 |
| | 2000 | 4,61 | 1,13 |
| | 2500 | 4,59 | 0,82 |

F_z [kN] as permanent loads; F_x [kN] as variable loads;
 $L_{max} = 1.100$ mm.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation $H/150$.

Working loads in accordance with Eurocode 3

Frame F 100

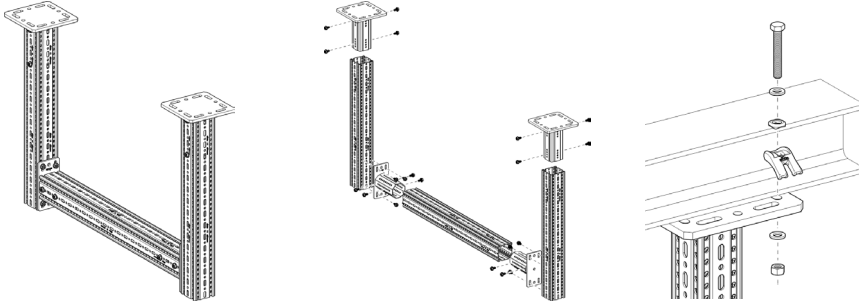

Part List

- 2 x End Support WBD F 100
- 3 x Beam Section TP F 100
- 2 x End Support STA F 100
- 24 x Self-Forming-Screw FLS F

| Distributed Load | L _{max} H _{max} [mm] | 1500 | | 2000 | | 2500 | | 3000 | | 3500 | | 4000 | |
|------------------|--|---------------------|-------------------------------------|---------------------|-------------------------------------|---------------------|-------------------------------------|---------------------|-------------------------------------|---------------------|-------------------------------------|---------------------|-------------------------------------|
| | | q _{z,perm} | F _z (q _z * L) | q _{z,perm} | F _z (q _z * L) | q _{z,perm} | F _z (q _z * L) | q _{z,perm} | F _z (q _z * L) | q _{z,perm} | F _z (q _z * L) | q _{z,perm} | F _z (q _z * L) |
| | | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] |
| 1500 | 16,48 | 24,72 | 12,29 | 24,57 | 9,75 | 24,38 | 6,23 | 18,70 | 4,18 | 14,63 | 2,94 | 11,78 | |
| 2000 | 16,42 | 24,63 | 12,23 | 24,46 | 9,70 | 24,24 | 6,16 | 18,49 | 4,13 | 14,47 | 2,91 | 11,64 | |
| 2500 | 16,38 | 24,57 | 12,18 | 24,37 | 9,65 | 24,12 | 6,10 | 18,29 | 4,09 | 14,31 | 2,88 | 11,51 | |
| 3000 | 16,33 | 24,50 | 12,14 | 24,28 | 9,55 | 23,88 | 6,04 | 18,11 | 4,05 | 14,17 | 2,85 | 11,40 | |
| 3500 | 16,31 | 24,46 | 12,13 | 24,25 | 9,46 | 23,65 | 5,98 | 17,94 | 4,01 | 14,04 | 2,82 | 11,29 | |

q_z [kN/m] as permanent load over L.

| Point Load | L _{max} H _{max} [mm] | 1500 | | 2000 | | 2500 | | 3000 | | 3500 | | 4000 | |
|------------|--|-------------------------|--|-------------------------|--|-------------------------|--|-------------------------|--|-------------------------|--|-------------------------|--|
| | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | |
| | | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z |
| 1500 | 24,61 | 8,39 | 19,50 | 8,39 | 15,77 | 8,23 | 11,76 | 8,23 | 9,11 | 8,09 | 7,28 | 6,94 | |
| 2000 | 24,51 | 6,33 | 19,43 | 6,24 | 15,62 | 6,24 | 11,65 | 6,15 | 9,02 | 6,07 | 7,21 | 6,07 | |
| 2500 | 24,39 | 5,21 | 19,34 | 5,15 | 15,48 | 5,09 | 11,54 | 5,09 | 8,94 | 5,03 | 7,14 | 4,98 | |
| 3000 | 24,36 | 4,33 | 19,26 | 4,29 | 15,35 | 4,25 | 11,44 | 4,21 | 8,86 | 4,21 | 7,08 | 4,17 | |
| 3500 | 24,33 | 3,75 | 19,20 | 3,75 | 15,23 | 3,72 | 11,35 | 3,68 | 8,79 | 3,66 | 7,02 | 3,63 | |

F_z [kN] as a permanent load at distance L/2; F_x [kN] as a variable load at distance L/2.

| 2 Point Loads | L _{max} H _{max} [mm] | 1500 | | 2000 | | 2500 | | 3000 | | 3500 | | 4000 | |
|---------------|--|-------------------------|--|-------------------------|--|-------------------------|--|-------------------------|--|-------------------------|--|-------------------------|--|
| | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | |
| | | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z |
| 1500 | 12,32 | 4,16 | 12,22 | 4,13 | 9,29 | 4,10 | 6,96 | 4,06 | 5,41 | 4,03 | 4,33 | 3,98 | |
| 2000 | 12,27 | 3,18 | 12,15 | 3,16 | 9,19 | 3,14 | 6,89 | 3,12 | 5,35 | 3,09 | 4,28 | 3,06 | |
| 2500 | 12,23 | 2,58 | 12,11 | 2,57 | 9,10 | 2,55 | 6,82 | 2,53 | 5,30 | 2,51 | 4,24 | 2,49 | |
| 3000 | 12,21 | 2,17 | 12,05 | 2,16 | 9,02 | 2,15 | 6,76 | 2,13 | 5,25 | 2,12 | 4,20 | 2,10 | |
| 3500 | 12,19 | 1,87 | 12,03 | 1,86 | 8,94 | 1,86 | 6,70 | 1,84 | 5,20 | 1,83 | 4,16 | 1,82 | |

F_z [kN] as permanent loads at distance 2*L/3 and L/3; F_x [kN] as variable loads at distance 2*L/3 and L/3.

| 3 Point Loads | L _{max} H _{max} [mm] | 1500 | | 2000 | | 2500 | | 3000 | | 3500 | | 4000 | |
|---------------|--|-------------------------|--|-------------------------|--|-------------------------|--|-------------------------|--|-------------------------|--|-------------------------|--|
| | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | |
| | | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z |
| 1500 | 8,22 | 2,77 | 8,16 | 2,75 | 6,62 | 2,73 | 4,97 | 2,71 | 3,87 | 2,69 | 3,11 | 2,66 | |
| 2000 | 8,19 | 2,12 | 8,11 | 2,11 | 6,55 | 2,10 | 4,92 | 2,08 | 3,83 | 2,06 | 3,07 | 2,05 | |
| 2500 | 8,16 | 1,72 | 8,08 | 1,71 | 6,48 | 1,70 | 4,87 | 1,69 | 3,79 | 1,68 | 3,04 | 1,66 | |
| 3000 | 8,14 | 1,45 | 8,05 | 1,44 | 6,42 | 1,43 | 4,83 | 1,42 | 3,76 | 1,41 | 3,01 | 1,40 | |
| 3500 | 8,13 | 1,25 | 8,03 | 1,24 | 6,37 | 1,24 | 4,79 | 1,23 | 3,72 | 1,22 | 2,98 | 1,21 | |


F_z [kN] as permanent loads at distance 3*L/4, L/2 and L/4; F_x [kN] as variable loads at distance 3*L/4, L/2 and L/4.

All illustrated structures are able to be installed standing as well.

Friction coefficient μ₀ = 0,2 for friction in longitudinal direction. Max. deviation H/100; L/200.

Working loads in accordance with Eurocode 3

Joining Beam Bracket F 100 horizontal

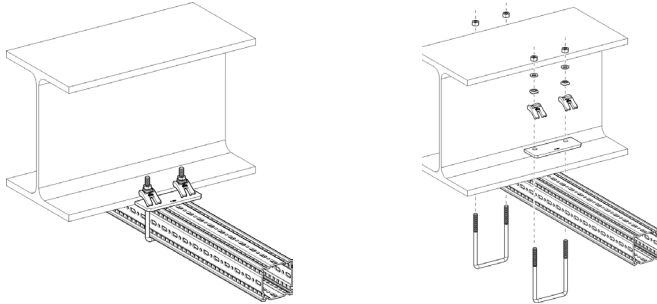

Part List

- 1 x Beam Section TP F 100
- 2 x U-Holder SB F 100-40

| Distributed Load | B | 100 | | 150 | | 200 | | 250 | | 300 | |
|------------------|-----------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|
| | | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ |
| | L_{max} | [mm] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN] |
| | 300 | 14,39 | 4,32 | 20,42 | 6,13 | 24,82 | 7,45 | 28,17 | 8,45 | 30,81 | 9,24 |
| | 500 | 5,64 | 2,82 | 8,38 | 4,19 | 10,53 | 5,26 | 12,27 | 6,13 | 13,70 | 6,85 |
| | 700 | 3,02 | 2,12 | 4,62 | 3,23 | 5,93 | 4,15 | 7,03 | 4,92 | 7,96 | 5,58 |
| | 900 | 1,88 | 1,69 | 2,93 | 2,64 | 3,82 | 3,44 | 4,59 | 4,13 | 5,26 | 4,73 |
| | 1100 | 1,28 | 1,41 | 2,02 | 2,22 | 2,67 | 2,94 | 3,24 | 3,56 | 3,74 | 4,12 |

q_z [kN/m] as permanent load over L.

| Point Load | B | 100 | | 150 | | 200 | | 250 | | 300 | |
|------------|-----------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|
| | | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ |
| | L_{max} | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 300 | 2,36 | 1,12 | 3,51 | 1,67 | 4,43 | 2,10 | 5,17 | 2,45 | 5,79 | 2,75 |
| | 500 | 1,55 | 0,74 | 2,41 | 1,14 | 3,14 | 1,49 | 3,77 | 1,79 | 4,32 | 2,05 |
| | 700 | 1,16 | 0,55 | 1,83 | 0,87 | 2,43 | 1,15 | 2,96 | 1,41 | 3,44 | 1,63 |
| | 900 | 0,92 | 0,44 | 1,48 | 0,70 | 1,98 | 0,94 | 2,44 | 1,16 | 2,86 | 1,36 |
| | 1100 | 0,77 | 0,36 | 1,24 | 0,59 | 1,67 | 0,79 | 2,08 | 0,99 | 2,45 | 1,16 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

| 2 Point Loads | B | 100 | | 150 | | 200 | | 250 | | 300 | |
|---------------|-----------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|
| | | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ |
| | L_{max} | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 300 | 1,46 | 0,69 | 2,12 | 1,01 | 2,62 | 1,24 | 3,01 | 1,43 | 3,32 | 1,57 |
| | 500 | 0,98 | 0,47 | 1,50 | 0,71 | 1,92 | 0,91 | 2,27 | 1,08 | 2,57 | 1,22 |
| | 700 | 0,74 | 0,35 | 1,16 | 0,55 | 1,51 | 0,72 | 1,82 | 0,86 | 2,09 | 0,99 |
| | 900 | 0,60 | 0,28 | 0,94 | 0,45 | 1,25 | 0,59 | 1,52 | 0,72 | 1,76 | 0,84 |
| | 1100 | 0,50 | 0,24 | 0,79 | 0,38 | 1,06 | 0,50 | 1,30 | 0,62 | 1,53 | 0,72 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.



| 3 Point Loads | B | 100 | | 150 | | 200 | | 250 | | 300 | |
|---------------|-----------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|
| | | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ |
| | L_{max} | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 300 | 1,06 | 0,50 | 1,52 | 0,72 | 1,86 | 0,88 | 2,12 | 1,00 | 2,33 | 1,10 |
| | 500 | 0,72 | 0,34 | 1,08 | 0,52 | 1,38 | 0,65 | 1,62 | 0,77 | 1,82 | 0,87 |
| | 700 | 0,55 | 0,26 | 0,84 | 0,40 | 1,10 | 0,52 | 1,31 | 0,62 | 1,50 | 0,71 |
| | 900 | 0,44 | 0,21 | 0,69 | 0,33 | 0,91 | 0,43 | 1,10 | 0,52 | 1,27 | 0,61 |
| | 1100 | 0,37 | 0,18 | 0,58 | 0,28 | 0,78 | 0,37 | 0,95 | 0,45 | 1,11 | 0,53 |

F_z [kN] as permanent loads at distance L, 2*L/3 and L/3; F_x [kN] as variable loads at distance L, 2*L/3 and L/3.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation L/100.

Working loads in accordance with Eurocode 3

Joining Beam Bracket F 100 vertical

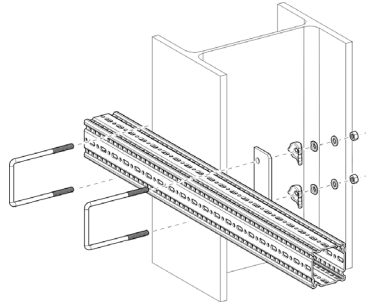

Part List
 1 x Beam Section TP F 100
 2 x U-Holder SB F 100-40

| Distributed Load | | 100 | | 150 | | 200 | | 250 | | 300 | |
|------------------|------|--------------|-----------------|--------------|-----------------|--------------|-----------------|--------------|-----------------|--------------|-----------------|
| | | $q_{z,perm}$ | $F_z (q_z * L)$ | $q_{z,perm}$ | $F_z (q_z * L)$ | $q_{z,perm}$ | $F_z (q_z * L)$ | $q_{z,perm}$ | $F_z (q_z * L)$ | $q_{z,perm}$ | $F_z (q_z * L)$ |
| L_{max} | [mm] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] |
| | 300 | 3,21 | 0,96 | 4,46 | 1,34 | 5,34 | 1,60 | 5,99 | 1,80 | 6,49 | 1,95 |
| | 500 | 1,36 | 0,68 | 1,98 | 0,99 | 2,47 | 1,23 | 2,86 | 1,43 | 3,17 | 1,58 |
| | 700 | 0,75 | 0,52 | 1,13 | 0,79 | 1,44 | 1,00 | 1,69 | 1,18 | 1,91 | 1,34 |
| | 900 | 0,47 | 0,43 | 0,73 | 0,65 | 0,94 | 0,85 | 1,12 | 1,01 | 1,28 | 1,15 |
| | 1100 | 0,33 | 0,36 | 0,51 | 0,56 | 0,67 | 0,73 | 0,80 | 0,88 | 0,92 | 1,02 |

q_z [kN/m] as permanent load over L.

| Point Load | | 100 | | 150 | | 200 | | 250 | | 300 | |
|------------|------|----------------------------|--------------------------------------|----------------------------|--------------------------------------|----------------------------|--------------------------------------|----------------------------|--------------------------------------|----------------------------|--------------------------------------|
| | | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ |
| L_{max} | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 300 | 0,59 | 0,56 | 0,88 | 0,84 | 1,11 | 1,06 | 1,29 | 1,24 | 1,45 | 1,39 |
| | 500 | 0,39 | 0,37 | 0,60 | 0,58 | 0,79 | 0,75 | 0,94 | 0,90 | 1,08 | 1,03 |
| | 700 | 0,29 | 0,28 | 0,46 | 0,44 | 0,61 | 0,58 | 0,74 | 0,71 | 0,86 | 0,83 |
| | 900 | 0,23 | 0,22 | 0,37 | 0,35 | 0,50 | 0,48 | 0,61 | 0,59 | 0,72 | 0,69 |
| | 1100 | 0,19 | 0,18 | 0,31 | 0,30 | 0,42 | 0,40 | 0,52 | 0,50 | 0,61 | 0,59 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

| 2 Point Loads | | 100 | | 150 | | 200 | | 250 | | 300 | |
|---------------|------|----------------------------|--------------------------------------|----------------------------|--------------------------------------|----------------------------|--------------------------------------|----------------------------|--------------------------------------|----------------------------|--------------------------------------|
| | | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ |
| L_{max} | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 300 | 0,37 | 0,35 | 0,53 | 0,51 | 0,65 | 0,63 | 0,75 | 0,72 | 0,83 | 0,80 |
| | 500 | 0,25 | 0,24 | 0,37 | 0,36 | 0,48 | 0,46 | 0,57 | 0,54 | 0,64 | 0,62 |
| | 700 | 0,19 | 0,18 | 0,29 | 0,28 | 0,38 | 0,36 | 0,46 | 0,44 | 0,52 | 0,50 |
| | 900 | 0,15 | 0,14 | 0,24 | 0,23 | 0,31 | 0,30 | 0,38 | 0,36 | 0,44 | 0,42 |
| | 1100 | 0,13 | 0,12 | 0,20 | 0,19 | 0,27 | 0,26 | 0,33 | 0,31 | 0,38 | 0,37 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.


| 3 Point Loads | | 100 | | 150 | | 200 | | 250 | | 300 | |
|---------------|------|----------------------------|--------------------------------------|----------------------------|--------------------------------------|----------------------------|--------------------------------------|----------------------------|--------------------------------------|----------------------------|--------------------------------------|
| | | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ | $F_{z,perm}$ for $F_x = 0$ | $F_{z,perm}$ for $F_x = \mu_0 * F_z$ |
| L_{max} | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 300 | 0,27 | 0,25 | 0,38 | 0,36 | 0,46 | 0,45 | 0,53 | 0,51 | 0,58 | 0,56 |
| | 500 | 0,18 | 0,17 | 0,27 | 0,26 | 0,35 | 0,33 | 0,41 | 0,39 | 0,46 | 0,44 |
| | 700 | 0,14 | 0,13 | 0,21 | 0,20 | 0,28 | 0,26 | 0,33 | 0,32 | 0,38 | 0,36 |
| | 900 | 0,11 | 0,11 | 0,17 | 0,17 | 0,23 | 0,22 | 0,28 | 0,27 | 0,32 | 0,31 |
| | 1100 | 0,09 | 0,09 | 0,15 | 0,14 | 0,20 | 0,19 | 0,24 | 0,23 | 0,28 | 0,27 |

F_z [kN] as permanent loads at distance L, 2*L/3 and L/3; F_x [kN] as variable loads at distance L, 2*L/3 and L/3.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation L/100.

Working loads in accordance with Eurocode 3

Beam Bracket F 100 - Variante a) clamped

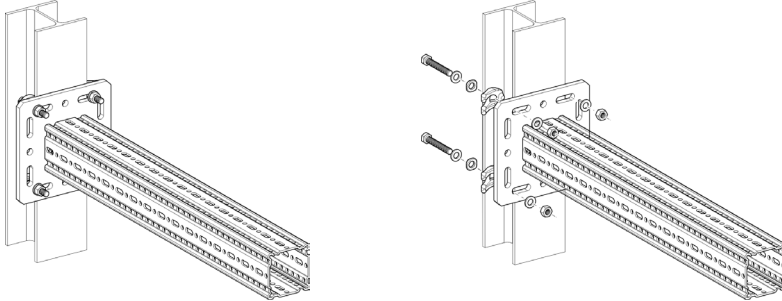

Part List

- 1 x Beam Bracket TKO F 100
- 1 x Assembly Set MS 5P M12 S

| Distributed Load | L_{max} | $q_{z, perm}$ | $F_z (q_{z, perm} * L)$ |
|------------------|-----------|---------------|-------------------------|
| | [mm] | [kN/m] | [kN] |
| | 300 | 54,99 | 16,50 |
| | 500 | 28,59 | 14,30 |
| | 700 | 14,59 | 10,21 |
| | 900 | 8,83 | 7,94 |
| | 1100 | 5,91 | 6,50 |

q_z [kN/m] as permanent load over L.

| Point Load | L_{max} | $F_{z, perm}$ for | |
|------------|-----------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 300 | 11,91 | 7,40 |
| | 500 | 7,15 | 4,44 |
| | 700 | 5,11 | 3,17 |
| | 900 | 3,97 | 2,47 |
| | 1100 | 3,25 | 2,02 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

| 2 Point Loads | L_{max} | $F_{z, perm}$ for | |
|---------------|-----------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 300 | 7,94 | 4,93 |
| | 500 | 4,77 | 2,96 |
| | 700 | 3,40 | 2,11 |
| | 900 | 2,65 | 1,64 |
| | 1100 | 2,17 | 1,34 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.


| 3 Point Loads | L_{max} | $F_{z, perm}$ for | |
|---------------|-----------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN/m] | [kN] |
| | 300 | 5,96 | 3,70 |
| | 500 | 3,57 | 2,22 |
| | 700 | 2,55 | 1,58 |
| | 900 | 1,99 | 1,23 |
| | 1100 | 1,62 | 1,01 |

F_z [kN] as permanent loads at distance L, $2*L/3$ and $L/3$; F_x [kN] as variable loads at distance L, $2*L/3$ and $L/3$.


Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation $L/100$.

Working loads in accordance with Eurocode 3

Beam Bracket F 100 - Variante b) anchored

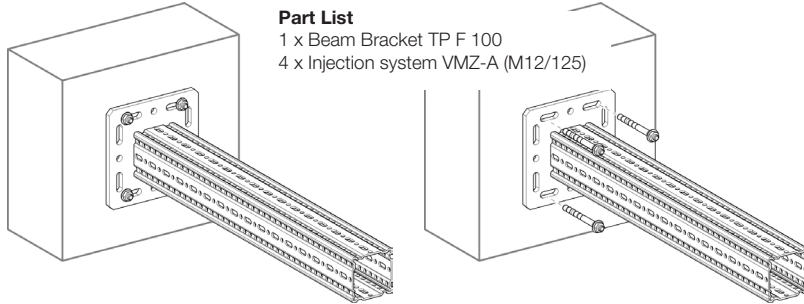

Part List
 1 x Beam Bracket TP F 100
 4 x Injection system VMZ-A (M12/125)

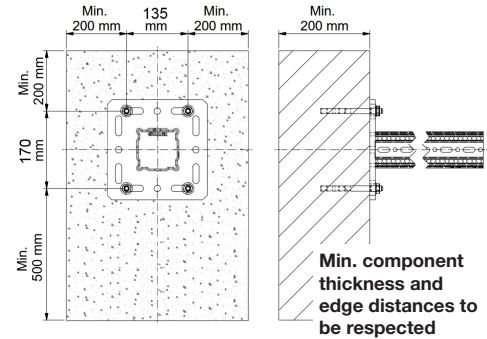

| Distributed Load | L_{max} | $q_{z, perm}$ | $F_z (q_{z, perm} * L)$ |
|------------------|-----------|---------------|-------------------------|
| | [mm] | [kN/m] | [kN] |
| | 300 | 42,31 | 12,69 |
| | 500 | 21,76 | 10,88 |
| | 700 | 13,61 | 9,52 |
| | 900 | 9,41 | 8,47 |
| | 1100 | 6,93 | 7,62 |

q_z [kN/m] as permanent load over L.

| Point Load | L_{max} | $F_{z, perm}$ for | |
|------------|-----------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 300 | 10,16 | 10,16 |
| | 500 | 8,02 | 8,02 |
| | 700 | 6,63 | 6,63 |
| | 900 | 5,33 | 5,33 |
| | 1100 | 4,35 | 4,35 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

| 2 Point Loads | L_{max} | $F_{z, perm}$ for | |
|---------------|-----------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 300 | 5,64 | 5,64 |
| | 500 | 4,62 | 4,62 |
| | 700 | 3,91 | 3,91 |
| | 900 | 3,39 | 3,39 |
| | 1100 | 2,90 | 2,90 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.


| 3 Point Loads | L_{max} | $F_{z, perm}$ for | |
|---------------|-----------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN/m] | [kN] |
| | 300 | 3,91 | 3,91 |
| | 500 | 3,24 | 3,24 |
| | 700 | 2,77 | 2,77 |
| | 900 | 2,42 | 2,42 |
| | 1100 | 2,15 | 2,15 |

F_z [kN] as permanent loads at distance L, 2*L/3 and L/3; F_x [kN] as variable loads at distance L, 2*L/3 and L/3.


Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation L/100.

Working loads in accordance with Eurocode 3

Beam Section TP F 100/160



Single-span beam with uniaxial load
dead weight of the profile is considered



| Distributed Load | L_{max} | $q_{z, perm}$ | $F_z (q_z * L)$ |
|------------------|-----------|---------------|-----------------|
| | [mm] | [kN/m] | [kN] |
| | 1000 | 112,43 | 112,43 |
| | 2000 | 35,94 | 71,89 |
| | 3000 | 15,88 | 47,65 |
| | 4000 | 7,05 | 28,19 |
| | 5000 | 3,61 | 18,04 |
| | 6000 | 2,09 | 12,53 |

q_z [kN/m] as permanent load over L.

| Point Load | L_{max} | $F_{z, perm}$ |
|------------|-----------|---------------|
| | [mm] | [N] |
| | 1000 | 72,13 |
| | 2000 | 35,94 |
| | 3000 | 23,82 |
| | 4000 | 17,62 |
| | 5000 | 11,28 |
| | 6000 | 7,83 |

F_z [kN] as a permanent load at L/2.

| 2 Point Loads | L_{max} | $F_{z, perm}$ |
|---------------|-----------|---------------|
| | [mm] | [N] |
| | 1000 | 54,10 |
| | 2000 | 26,96 |
| | 3000 | 17,87 |
| | 4000 | 10,34 |
| | 5000 | 6,62 |
| | 6000 | 4,60 |

F_z [kN] as permanent loads at L/3 and 2*L/3.


| 3 Point Loads | L_{max} | $F_{z, perm}$ |
|---------------|-----------|---------------|
| | [mm] | [N] |
| | 1000 | 36,07 |
| | 2000 | 17,97 |
| | 3000 | 11,91 |
| | 4000 | 7,42 |
| | 5000 | 4,75 |
| | 6000 | 3,30 |

F_z [kN] as permanent loads at L/4, L/2 and 3*L/4.

Max. bending L/200.

Working loads in accordance with Eurocode 3

L-Construction F 100/160

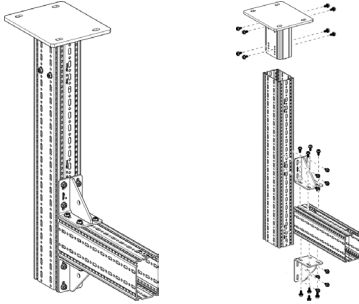

Part List

- 1 x End Support WBD F 100/160
- 2 x Beam Section TP F 100/160
- 2 x Corner Bracket WD F 100 140/140
- 24 x Self-Forming-Screw FLS F

| Distributed Load | L_{max} | 300 | | 500 | | 700 | | 900 | | 1100 | |
|------------------|-----------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|
| | | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ |
| | [mm] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] |
| | 2000 | 23,30 | 6,99 | 9,91 | 4,96 | 5,40 | 3,78 | 3,36 | 3,02 | 2,27 | 2,49 |
| | 2500 | 21,42 | 6,43 | 9,15 | 4,58 | 4,99 | 3,49 | 3,11 | 2,79 | 2,10 | 2,31 |
| | 3000 | 19,82 | 5,94 | 8,50 | 4,25 | 4,64 | 3,25 | 2,89 | 2,60 | 1,95 | 2,14 |
| | 3500 | 18,43 | 5,53 | 7,93 | 3,96 | 4,33 | 3,03 | 2,70 | 2,43 | 1,82 | 2,00 |

q_z [kN/m] as permanent load over L.

| Point Load | L_{max} | 300 | | 500 | | 700 | | 900 | | 1100 | |
|------------|-----------|-------------|---------------------|-------------|---------------------|-------------|---------------------|-------------|---------------------|-------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 2000 | 4,04 | 3,10 | 2,71 | 2,71 | 2,01 | 2,01 | 1,58 | 1,58 | 1,29 | 1,29 |
| | 2500 | 3,72 | 2,63 | 2,51 | 2,38 | 1,87 | 1,87 | 1,47 | 1,47 | 1,20 | 1,20 |
| | 3000 | 3,46 | 2,28 | 2,34 | 2,09 | 1,74 | 1,74 | 1,37 | 1,37 | 1,12 | 1,12 |
| | 3500 | 3,23 | 2,02 | 2,19 | 1,87 | 1,63 | 1,63 | 1,28 | 1,28 | 1,04 | 1,04 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.


| 2 Point Loads | L_{max} | 300 | | 500 | | 700 | | 900 | | 1100 | |
|---------------|-----------|-------------|---------------------|-------------|---------------------|-------------|---------------------|-------------|---------------------|-------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 2000 | 2,56 | 1,62 | 1,76 | 1,48 | 1,32 | 1,32 | 1,04 | 1,04 | 0,85 | 0,85 |
| | 2500 | 2,36 | 1,37 | 1,62 | 1,26 | 1,22 | 1,170 | 0,96 | 0,96 | 0,79 | 0,79 |
| | 3000 | 2,19 | 1,18 | 1,51 | 1,10 | 1,13 | 1,03 | 0,90 | 0,90 | 0,73 | 0,73 |
| | 3500 | 2,04 | 1,04 | 1,41 | 0,98 | 1,06 | 0,92 | 0,84 | 0,84 | 0,69 | 0,69 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.

| 3 Point Loads | | L_{max} | 300 | | 500 | | 700 | | 900 | | 1100 | |
|---------------|------|-------------|---------------------|-------------|---------------------|-------------|---------------------|-------------|---------------------|-------------|---------------------|-------------|
| | | | $F_{z, perm}$ for | | $F_{z, perm}$ for | | $F_{z, perm}$ for | | $F_{z, perm}$ for | | $F_{z, perm}$ for | |
| H_{max} | [mm] | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | |
| | | 2000 | | 1,86 | 1,10 | 1,28 | 1,01 | 0,96 | 0,93 | 0,76 | 0,76 | 0,63 |
| 2500 | | 1,71 | 0,92 | 1,18 | 0,86 | 0,89 | 0,80 | 0,71 | 0,71 | 0,58 | 0,58 | |
| 3000 | | 1,59 | 0,80 | 1,10 | 0,75 | 0,83 | 0,70 | 0,66 | 0,66 | 0,54 | 0,54 | |
| 3500 | | 1,48 | 0,70 | 1,03 | 0,66 | 0,78 | 0,63 | 0,62 | 0,59 | 0,51 | 0,51 | |

F_z [kN] as permanent loads at distance L, 2*L/3 and L/3; F_x [kN] as variable loads at distance L, 2*L/3 and L/3.

For assembly with STA F 100 - 100/160 the loads have to be reduced by 10 % reduction ratio F_z .

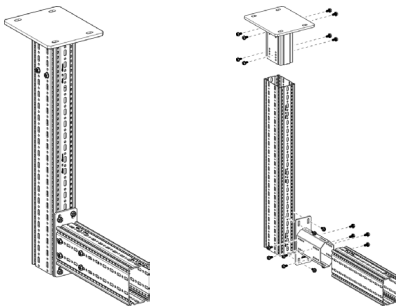


Part List

- 1 x End Support WBD F 100/160
- 2 x Beam Section TP F 100/160
- 1 x End Support STA F 100 - 100/160
- 20 x Self-Forming-Screw FLS F

All illustrated structures are able to be installed standing as well.
Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation $H/100$; $L/100$.


Working loads in accordance with Eurocode 3


T-Support F 100/160

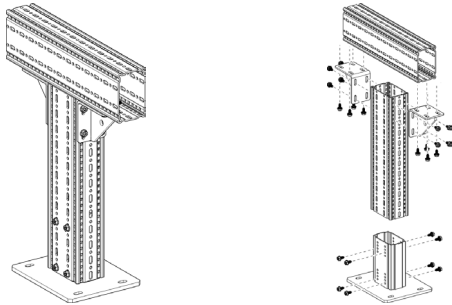



Part List

- 1 x End Support WBD F 100/160
- 2 x Beam Section TP F 100/160
- 2 x Corner Bracket WD F 100
- 24 x Self-Forming-Screw FLS F

| Distributed Load - symmetrical | | H_{max} | $q_{z, perm}$ | $F_z (q_{z, perm} * 1m)$ |
|--|--|-----------|---------------|--------------------------|
|  | | [mm] | [kN/m] | [kN] |
| | | 2000 | 15,89 | 15,89 |
| | | 2500 | 15,81 | 15,81 |
| | | 3000 | 15,73 | 15,73 |
| | | 3500 | 15,65 | 15,65 |
| q_z [kN/m] as permanent load over L; $L_{max} = 1.100$ mm. | | | | |

| Point Load - central | | H_{max} | $F_{z, perm}$ for | |
|---|--|-----------|-------------------|---------------------|
|  | | [mm] | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | | | [kN] | [kN] |
| | | 2000 | 15,27 | 3,35 |
| | | 2500 | 15,19 | 2,52 |
| | | 3000 | 15,11 | 1,98 |
| | | 3500 | 15,04 | 1,61 |
| F_z [kN] as a permanent load; F_x [kN] as a variable load; Central load introduction for planned eccentricity ± 50 mm. | | | | |


| 2 Point Loads - symmetrical | | H_{max} | $F_{z, perm}$ for | |
|---|--|-----------|-------------------|---------------------|
|  | | [mm] | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | | | [kN] | [kN] |
| | | 2000 | 7,93 | 1,75 |
| | | 2500 | 7,89 | 1,30 |
| | | 3000 | 7,85 | 1,02 |
| | | 3500 | 7,81 | 0,82 |
| F_z [kN] as permanent loads; F_x [kN] as variable loads; $L_{max} = 1.100$ mm. | | | | |

| 3 Point Loads - symmetrical | | H_{max} | $F_{z, perm}$ for | |
|---|--|-----------|-------------------|---------------------|
|  | | [mm] | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | | | [kN/m] | [kN] |
| | | 2000 | 5,29 | 1,17 |
| | | 2500 | 5,26 | 0,87 |
| | | 3000 | 5,23 | 0,68 |
| | | 3500 | 5,21 | 0,55 |
| F_z [kN] as permanent loads; F_x [kN] as variable loads; $L_{max} = 1.100$ mm. | | | | |

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction. Max. deviation $H/150$.

Working loads in accordance with Eurocode 3

Frame F 100/160

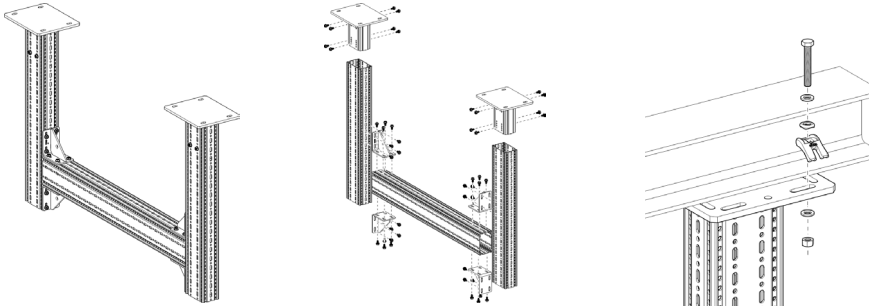

Part List

- 2 x End Support WBD F 100/160
- 3 x Beam Section TP F 100/160
- 4 x Corner Bracket WD F 100
- 48 x Self-Forming-Screw FLS F

Distributed Load

| H_{max} | L_{max} | 1500 | | 2000 | | 2500 | | 3000 | | 3500 | | 4000 | |
|-----------|-----------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | | $q_{z, perm}$ [kN/m] | $F_z (q_z * L)$ [kN] | $q_{z, perm}$ [kN/m] | $F_z (q_z * L)$ [kN] | $q_{z, perm}$ [kN/m] | $F_z (q_z * L)$ [kN] | $q_{z, perm}$ [kN/m] | $F_z (q_z * L)$ [kN] | $q_{z, perm}$ [kN/m] | $F_z (q_z * L)$ [kN] | $q_{z, perm}$ [kN/m] | $F_z (q_z * L)$ [kN] |
| 2000 | | 26,71 | 32,58 | 18,80 | 32,34 | 14,45 | 32,07 | 11,69 | 31,79 | 9,78 | 31,50 | 8,26 | 30,72 |
| 2500 | | 26,49 | 32,31 | 18,63 | 32,04 | 14,30 | 31,74 | 11,55 | 31,42 | 9,65 | 31,09 | 8,26 | 30,74 |
| 3000 | | 26,29 | 32,07 | 18,48 | 31,78 | 14,17 | 31,45 | 11,43 | 31,10 | 9,55 | 30,74 | 8,16 | 30,36 |
| 3500 | | 26,11 | 31,85 | 18,34 | 31,54 | 14,05 | 31,19 | 11,33 | 30,82 | 9,45 | 30,43 | 8,07 | 30,03 |
| 4000 | | 25,94 | 31,64 | 18,21 | 31,32 | 13,95 | 30,96 | 11,24 | 30,58 | 9,37 | 30,18 | 7,93 | 29,51 |

q_z [kN/m] as permanent load over L.

Point Load

| H_{max} | L_{max} | 1500 | | 2000 | | 2500 | | 3000 | | 3500 | | 4000 | |
|-----------|-----------|--------------------------------|---------------------|--------------------------------|---------------------|--------------------------------|---------------------|--------------------------------|---------------------|--------------------------------|---------------------|--------------------------------|---------------------|
| | | $F_{z, perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| 2000 | | 32,52 | 7,96 | 32,21 | 7,93 | 31,76 | 7,88 | 27,97 | 7,83 | 24,47 | 7,78 | 21,81 | 7,57 |
| 2500 | | 32,23 | 6,47 | 31,89 | 6,44 | 31,51 | 6,40 | 27,81 | 6,36 | 24,33 | 6,32 | 21,67 | 6,22 |
| 3000 | | 31,97 | 5,44 | 31,61 | 5,42 | 31,17 | 5,39 | 27,65 | 5,37 | 24,18 | 5,30 | 21,54 | 5,17 |
| 3500 | | 31,75 | 4,60 | 31,36 | 4,58 | 30,89 | 4,54 | 27,49 | 4,49 | 24,04 | 4,43 | 21,42 | 4,35 |
| 4000 | | 31,52 | 3,87 | 31,11 | 3,85 | 30,64 | 3,83 | 27,33 | 3,80 | 23,90 | 3,76 | 21,29 | 3,69 |

F_z [kN] as a permanent load at distance L/2; F_x [kN] as a variable load at distance L/2.

2 Point Loads


| H_{max} | L_{max} | 1500 | | 2000 | | 2500 | | 3000 | | 3500 | | 4000 | |
|-----------|-----------|--------------------------------|---------------------|--------------------------------|---------------------|--------------------------------|---------------------|--------------------------------|---------------------|--------------------------------|---------------------|--------------------------------|---------------------|
| | | $F_{z, perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| 2000 | | 16,27 | 3,98 | 16,13 | 3,97 | 15,98 | 3,95 | 15,81 | 3,93 | 15,38 | 3,90 | 13,71 | 3,88 |
| 2500 | | 16,14 | 3,23 | 15,98 | 3,22 | 15,80 | 3,21 | 15,61 | 3,19 | 15,41 | 3,17 | 13,49 | 3,15 |
| 3000 | | 16,01 | 2,72 | 15,84 | 2,71 | 15,65 | 2,70 | 15,44 | 2,69 | 15,22 | 2,67 | 13,29 | 2,61 |
| 3500 | | 15,90 | 2,30 | 15,72 | 2,29 | 15,51 | 2,28 | 15,29 | 2,26 | 15,06 | 2,23 | 13,10 | 2,19 |
| 4000 | | 15,79 | 1,93 | 15,60 | 1,93 | 15,39 | 1,92 | 15,16 | 1,91 | 14,91 | 1,89 | 12,92 | 1,87 |

F_z [kN] as permanent loads at distance $2L/3$ and $L/3$; F_x [kN] as variable loads at distance $2L/3$ and $L/3$.

| 3 Point Loads | | L _{max} | 1500 | | 2000 | | 2500 | | 3000 | | 3500 | | 4000 | |
|------------------|-------|--------------------|--|--------------------|--|--------------------|--|--------------------|--|--------------------|--|--------------------|--|------|
| | | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | | F _{z,perm} for | |
| H _{max} | [mm] | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | |
| | | 2000 | 10,85 | 2,66 | 10,76 | 2,64 | 10,66 | 2,63 | 10,53 | 2,62 | 10,44 | 2,61 | 9,52 | 2,59 |
| 2500 | 10,76 | 2,16 | 10,66 | 2,15 | 10,55 | 2,14 | 10,43 | 2,13 | 10,30 | 2,12 | 9,64 | 2,10 | | |
| 3000 | 10,68 | 1,82 | 10,57 | 1,81 | 10,45 | 1,80 | 10,32 | 1,79 | 10,18 | 1,78 | 9,49 | 1,75 | | |
| 3500 | 10,61 | 1,53 | 10,49 | 1,53 | 10,36 | 1,52 | 10,22 | 1,51 | 10,07 | 1,49 | 9,35 | 1,47 | | |
| 4000 | 10,54 | 1,29 | 10,41 | 1,29 | 10,28 | 1,28 | 10,13 | 1,27 | 9,97 | 1,26 | 9,22 | 1,25 | | |

F_z [kN] as permanent loads at distance 3*L/4, L/2 and L/4; F_x [kN] as variable loads at distance 3*L/4, L/2 and L/4.

For assembly with STA F 100 - 100/160 F_z has to be reduced by the reduction ratio F_a.

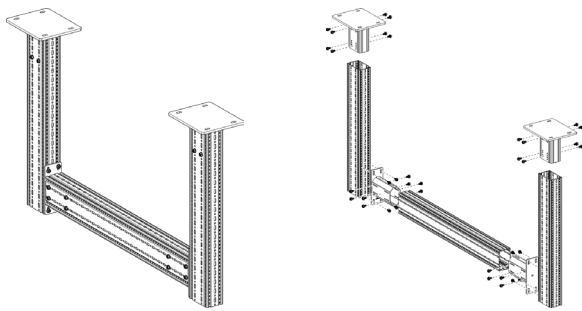

Part List

- 2 x End Support WBD F 100/160
- 3 x Beam Section TP F 100/160
- 2 x End Support STA F 100 - 100/160
- 24 x Self-Forming-Screw FLS F


| L (mm) | Reduction ratio F _a [%] | |
|--------|------------------------------------|---------------------------------------|
| | F _x = 0 | F _x = 0,2 * F _z |
| 2000 | -30% | 0% |
| 2500 | -38% | 0% |
| 3000 | -45% | 0% |
| 3500 | -53% | 0% |
| 4000 | -60% | 0% |

All illustrated structures are able to be installed standing as well.

Friction coefficient μ₀ = 0,2 for friction in longitudinal direction. Max. deviation H/100; L/200.

Working loads in accordance with Eurocode 3

Joining Beam Bracket F 100/160 horizontal

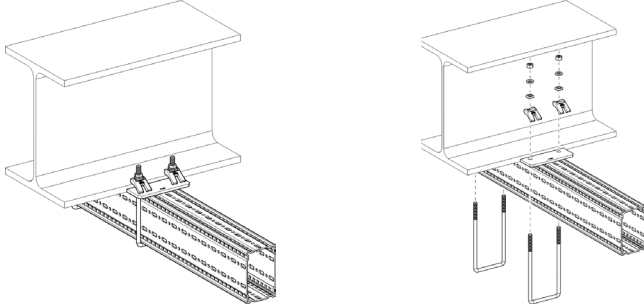

Part List

- 1 x Beam Section TP F 100/160
- 2 x U-Holder SB F 100/160-40

Distributed Load

| L _{max} | B 100 | | 150 | | 200 | | 250 | | 300 | |
|------------------|-----------------------------|--|-----------------------------|--|-----------------------------|--|-----------------------------|--|-----------------------------|--|
| | q _{z, perm} [kN/m] | F _z (q _z * L) [kN] | q _{z, perm} [kN/m] | F _z (q _z * L) [kN] | q _{z, perm} [kN/m] | F _z (q _z * L) [kN] | q _{z, perm} [kN/m] | F _z (q _z * L) [kN] | q _{z, perm} [kN/m] | F _z (q _z * L) [kN] |
| 300 | 14,39 | 4,32 | 20,42 | 6,13 | 24,82 | 7,45 | 28,17 | 8,45 | 30,81 | 9,24 |
| 500 | 5,64 | 2,82 | 8,38 | 4,19 | 10,53 | 5,26 | 12,27 | 6,13 | 13,70 | 6,85 |
| 700 | 3,02 | 2,12 | 4,62 | 3,23 | 5,93 | 4,15 | 7,03 | 4,92 | 7,96 | 5,58 |
| 900 | 1,88 | 1,69 | 2,93 | 2,64 | 3,82 | 3,44 | 4,59 | 4,13 | 5,26 | 4,73 |
| 1100 | 1,28 | 1,41 | 2,02 | 2,22 | 2,67 | 2,94 | 3,24 | 3,56 | 3,74 | 4,12 |

q_z [kN/m] as permanent load over L.

Point Load

| L _{max} | B 100 | | 150 | | 200 | | 250 | | 300 | |
|------------------|--|--|--|--|--|--|--|--|--|--|
| | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] |
| 300 | 2,36 | 1,12 | 3,51 | 1,67 | 4,43 | 2,10 | 5,17 | 2,45 | 5,79 | 2,75 |
| 500 | 1,55 | 0,74 | 2,41 | 1,14 | 3,14 | 1,49 | 3,77 | 1,79 | 4,32 | 2,05 |
| 700 | 1,16 | 0,55 | 1,83 | 0,87 | 2,43 | 1,15 | 2,96 | 1,41 | 3,44 | 1,63 |
| 900 | 0,92 | 0,44 | 1,48 | 0,70 | 1,98 | 0,94 | 2,44 | 1,16 | 2,86 | 1,36 |
| 1100 | 0,77 | 0,36 | 1,24 | 0,59 | 1,67 | 0,79 | 2,08 | 0,99 | 2,45 | 1,16 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

2 Point Loads

| L _{max} | B 100 | | 150 | | 200 | | 250 | | 300 | |
|------------------|--|--|--|--|--|--|--|--|--|--|
| | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] |
| 300 | 1,46 | 0,69 | 2,12 | 1,01 | 2,62 | 1,24 | 3,01 | 1,43 | 3,32 | 1,57 |
| 500 | 0,98 | 0,47 | 1,50 | 0,71 | 1,92 | 0,91 | 2,27 | 1,08 | 2,57 | 1,22 |
| 700 | 0,74 | 0,35 | 1,16 | 0,55 | 1,51 | 0,72 | 1,82 | 0,86 | 2,09 | 0,99 |
| 900 | 0,60 | 0,28 | 0,94 | 0,45 | 1,25 | 0,59 | 1,52 | 0,72 | 1,76 | 0,84 |
| 1100 | 0,50 | 0,24 | 0,79 | 0,38 | 1,06 | 0,50 | 1,30 | 0,62 | 1,53 | 0,72 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.

3 Point Loads


| L _{max} | B 100 | | 150 | | 200 | | 250 | | 300 | |
|------------------|--|--|--|--|--|--|--|--|--|--|
| | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] | F _{z, perm} for F _x = 0 [kN] | F _{z, perm} for F _x = μ ₀ * F _z [kN] |
| 300 | 1,06 | 0,50 | 1,52 | 0,72 | 1,86 | 0,88 | 2,12 | 1,00 | 2,33 | 1,10 |
| 500 | 0,72 | 0,34 | 1,08 | 0,52 | 1,38 | 0,65 | 1,62 | 0,77 | 1,82 | 0,87 |
| 700 | 0,55 | 0,26 | 0,84 | 0,40 | 1,10 | 0,52 | 1,31 | 0,62 | 1,50 | 0,71 |
| 900 | 0,44 | 0,21 | 0,69 | 0,33 | 0,91 | 0,43 | 1,10 | 0,52 | 1,27 | 0,61 |
| 1100 | 0,37 | 0,18 | 0,58 | 0,28 | 0,78 | 0,37 | 0,95 | 0,45 | 1,11 | 0,53 |

F_z [kN] as permanent loads at distance L, 2*L/3 and L/3; F_x [kN] as variable loads at distance L, 2*L/3 and L/3.

Friction coefficient μ₀ = 0,2 for friction in longitudinal direction. Max. deviation L/100.

Working loads in accordance with Eurocode 3

Joining Beam Bracket F 100/160 vertical

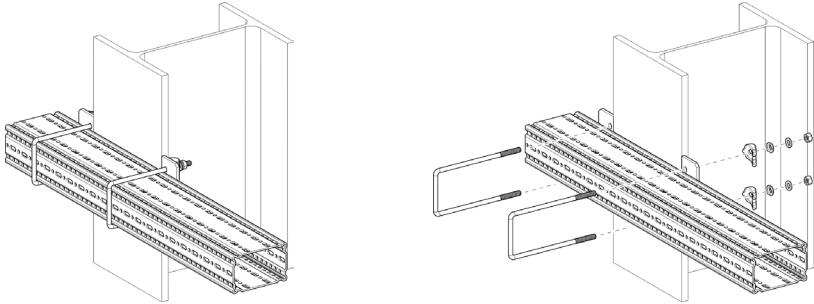

Part List

- 1 x Beam Section TP F 100/160
- 2 x U-Holder SB F 100/160-40

Distributed Load

| L _{max} | B 100 | | 150 | | 200 | | 250 | | 300 | |
|------------------|----------------------|-------------------------------------|----------------------|-------------------------------------|----------------------|-------------------------------------|----------------------|-------------------------------------|----------------------|-------------------------------------|
| | q _{z, perm} | F _z (q _z * L) | q _{z, perm} | F _z (q _z * L) | q _{z, perm} | F _z (q _z * L) | q _{z, perm} | F _z (q _z * L) | q _{z, perm} | F _z (q _z * L) |
| 300 | 3,21 | 0,96 | 4,46 | 1,34 | 5,34 | 1,60 | 5,99 | 1,80 | 6,49 | 1,95 |
| 500 | 1,36 | 0,68 | 1,98 | 0,99 | 2,47 | 1,23 | 2,86 | 1,43 | 3,17 | 1,58 |
| 700 | 0,75 | 0,52 | 1,13 | 0,79 | 1,44 | 1,00 | 1,69 | 1,18 | 1,91 | 1,34 |
| 900 | 0,47 | 0,43 | 0,73 | 0,65 | 0,94 | 0,85 | 1,12 | 1,01 | 1,28 | 1,15 |
| 1100 | 0,33 | 0,36 | 0,51 | 0,56 | 0,67 | 0,73 | 0,80 | 0,88 | 0,92 | 1,02 |

q_z [kN/m] as permanent load over L.

Point Load

| L _{max} | B 100 | | 150 | | 200 | | 250 | | 300 | |
|------------------|---|---|---|---|---|---|---|---|---|---|
| | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z |
| 300 | 0,59 | 0,56 | 0,88 | 0,84 | 1,11 | 1,06 | 1,29 | 1,24 | 1,45 | 1,39 |
| 500 | 0,39 | 0,37 | 0,60 | 0,58 | 0,79 | 0,75 | 0,94 | 0,90 | 1,08 | 1,03 |
| 700 | 0,29 | 0,28 | 0,46 | 0,44 | 0,61 | 0,58 | 0,74 | 0,71 | 0,86 | 0,83 |
| 900 | 0,23 | 0,22 | 0,37 | 0,35 | 0,50 | 0,48 | 0,61 | 0,59 | 0,72 | 0,69 |
| 1100 | 0,19 | 0,18 | 0,31 | 0,30 | 0,42 | 0,40 | 0,52 | 0,50 | 0,61 | 0,59 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

2 Point Loads

| L _{max} | B 100 | | 150 | | 200 | | 250 | | 300 | |
|------------------|---|---|---|---|---|---|---|---|---|---|
| | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z |
| 300 | 0,37 | 0,35 | 0,53 | 0,51 | 0,65 | 0,63 | 0,75 | 0,72 | 0,83 | 0,80 |
| 500 | 0,25 | 0,24 | 0,37 | 0,36 | 0,48 | 0,46 | 0,57 | 0,54 | 0,64 | 0,62 |
| 700 | 0,19 | 0,18 | 0,29 | 0,28 | 0,38 | 0,36 | 0,46 | 0,44 | 0,52 | 0,50 |
| 900 | 0,15 | 0,14 | 0,24 | 0,23 | 0,31 | 0,30 | 0,38 | 0,36 | 0,44 | 0,42 |
| 1100 | 0,13 | 0,12 | 0,20 | 0,19 | 0,27 | 0,26 | 0,33 | 0,31 | 0,38 | 0,37 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.

3 Point Loads


| L _{max} | B 100 | | 150 | | 200 | | 250 | | 300 | |
|------------------|---|---|---|---|---|---|---|---|---|---|
| | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z | F _{z, perm} for F _x = 0 | F _{z, perm} for F _x = μ ₀ * F _z |
| 300 | 0,27 | 0,25 | 0,38 | 0,36 | 0,46 | 0,45 | 0,53 | 0,51 | 0,58 | 0,56 |
| 500 | 0,18 | 0,17 | 0,27 | 0,26 | 0,35 | 0,33 | 0,41 | 0,39 | 0,46 | 0,44 |
| 700 | 0,14 | 0,13 | 0,21 | 0,20 | 0,28 | 0,26 | 0,33 | 0,32 | 0,38 | 0,36 |
| 900 | 0,11 | 0,11 | 0,17 | 0,17 | 0,23 | 0,22 | 0,28 | 0,27 | 0,32 | 0,31 |
| 1100 | 0,09 | 0,09 | 0,15 | 0,14 | 0,20 | 0,19 | 0,24 | 0,23 | 0,28 | 0,27 |

F_z [kN] as permanent loads at distance L, 2*L/3 and L/3; F_x [kN] as variable loads at distance L, 2*L/3 and L/3.

Friction coefficient μ₀ = 0,2 for friction in longitudinal direction; Max. deviation L/100.

Working loads in accordance with Eurocode 3

Beam Bracket F 100/160 - Variante a) clamped

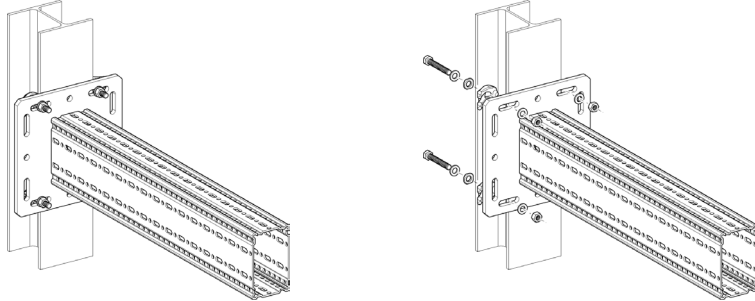

Part List

- 1 x Beam Bracket TKO F 100/160
- 1 x Assembly Set MS 5P M12 S

| Distributed Load | L_{max} | $q_{z, perm}$ | $F_z (q_z * L)$ |
|------------------|-----------|---------------|-----------------|
| | [mm] | [kN/m] | [kN] |
| | 300 | 47,89 | 14,37 |
| | 500 | 36,39 | 18,20 |
| | 700 | 18,57 | 13,00 |
| | 900 | 11,23 | 10,11 |
| | 1100 | 7,52 | 8,27 |

q_z [kN/m] as permanent load over L.

| Point Load | L_{max} | $F_{z, perm}$ for | |
|------------|-----------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 300 | 15,16 | 9,35 |
| | 500 | 9,10 | 5,61 |
| | 700 | 6,50 | 4,01 |
| | 900 | 5,05 | 3,12 |
| | 1100 | 4,14 | 2,55 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

| 2 Point Loads | L_{max} | $F_{z, perm}$ for | |
|---------------|-----------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 300 | 9,41 | 6,23 |
| | 500 | 6,07 | 3,74 |
| | 700 | 4,33 | 2,67 |
| | 900 | 3,37 | 2,08 |
| | 1100 | 2,76 | 1,70 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.

| 3 Point Loads | L_{max} | $F_{z, perm}$ for | |
|---------------|-----------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 300 | 5,69 | 4,67 |
| | 500 | 4,55 | 2,80 |
| | 700 | 3,25 | 2,00 |
| | 900 | 2,53 | 1,56 |
| | 1100 | 2,07 | 1,27 |



F_z [kN] as permanent loads at distance L, 2*L/3 and L/3; F_x [kN] as variable loads at distance L, 2*L/3 and L/3.

Working loads in accordance with Eurocode 3

Beam Bracket F 100/160 - Variante b) anchored

Part List

- 1 x Beam Bracket TKO F 100/160
- 4 x Injection system VMZ-A (M12/125)

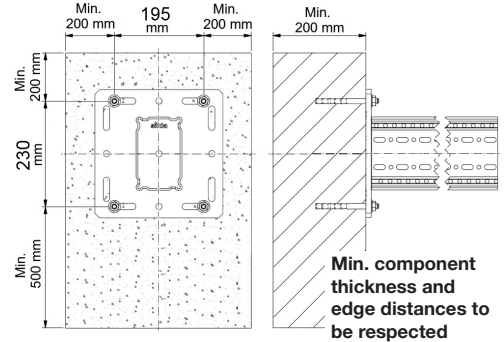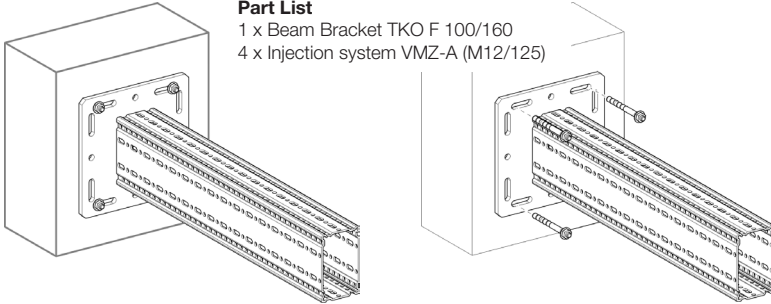

Distributed Load

| L_{max} | $q_{z, perm}$ | $F_z (q_z * L)$ |
|-----------|---------------|-----------------|
| [mm] | [kN/m] | [kN] |
| 300 | 49,07 | 14,72 |
| 500 | 26,18 | 13,09 |
| 700 | 16,83 | 11,78 |
| 900 | 11,90 | 10,71 |
| 1100 | 8,93 | 9,82 |

q_z [kN/m] as permanent load over L.

Point Load

| L_{max} | $F_{z, perm}$ for | |
|-----------|-------------------|---------------------|
| | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| [mm] | [kN] | [kN] |
| 300 | 12,40 | 12,40 |
| 500 | 10,25 | 10,25 |
| 700 | 8,73 | 8,73 |
| 900 | 7,07 | 7,07 |
| 1100 | 5,78 | 5,78 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

2 Point Loads

| L_{max} | $F_{z, perm}$ for | |
|-----------|-------------------|---------------------|
| | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| [mm] | [kN] | [kN] |
| 300 | 6,73 | 6,73 |
| 500 | 5,75 | 5,75 |
| 700 | 5,01 | 5,01 |
| 900 | 4,45 | 4,45 |
| 1100 | 3,86 | 3,86 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.

3 Point Loads


| L_{max} | $F_{z, perm}$ for | |
|-----------|-------------------|---------------------|
| | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| [mm] | [kN/m] | [kN] |
| 300 | 4,62 | 4,62 |
| 500 | 3,99 | 3,99 |
| 700 | 3,52 | 3,52 |
| 900 | 3,14 | 3,14 |
| 1100 | 2,84 | 2,84 |

F_z [kN] as permanent loads at distance L, 2L/3 and L/3; F_x [kN] as variable loads at distance L, 2L/3 and L/3.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction; Max. deviation L/100.

Working loads in accordance with Eurocode 3

L-Construction F 100/160 - 100

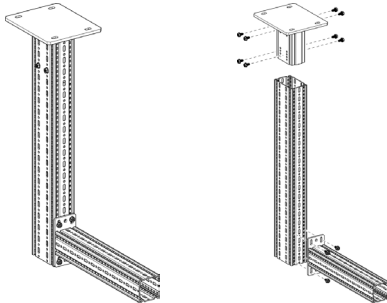

Part List

- 1 x End Support WBD F 100/160
- 1 x Beam Section TP F 100/160
- 1 x Cantilever Bracket AK F 100
- 12 x Self-Forming-Screw FLS F

| Distributed Load | | 300 | | 500 | | 700 | | 900 | | 1100 | |
|------------------|-----------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|
| | | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ | $q_{z, perm}$ | $F_z (q_z * L)$ |
| H_{max} | L_{max} | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] |
| [mm] | [mm] | | | | | | | | | | |
| 2000 | | 22,46 | 6,74 | 9,69 | 4,84 | 5,26 | 3,68 | 3,25 | 2,92 | 2,18 | 2,39 |
| 2500 | | 20,64 | 6,19 | 8,95 | 4,48 | 4,87 | 3,41 | 3,02 | 2,71 | 2,02 | 2,23 |
| 3000 | | 19,10 | 5,73 | 8,32 | 4,16 | 4,54 | 3,18 | 2,81 | 2,53 | 1,89 | 2,08 |
| 3500 | | 17,76 | 5,33 | 7,77 | 3,88 | 4,25 | 2,98 | 2,64 | 2,37 | 1,77 | 1,95 |

q_z [kN/m] as permanent load over L.

| Point Load | | 300 | | 500 | | 700 | | 900 | | 1100 | |
|------------|-----------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|
| | | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ |
| H_{max} | L_{max} | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| [mm] | [mm] | | | | | | | | | | |
| 2000 | | 4,00 | 3,39 | 2,65 | 2,49 | 1,94 | 1,94 | 1,50 | 1,50 | 1,21 | 1,21 |
| 2500 | | 3,70 | 3,16 | 2,46 | 2,36 | 1,80 | 1,80 | 1,40 | 1,40 | 1,13 | 1,13 |
| 3000 | | 3,44 | 2,88 | 2,30 | 2,25 | 1,69 | 1,69 | 1,31 | 1,31 | 1,06 | 1,06 |
| 3500 | | 3,21 | 2,36 | 2,15 | 2,14 | 1,58 | 1,58 | 1,23 | 1,23 | 0,99 | 0,99 |

F_z [kN] as a permanent load at distance L; F_x [kN] as a variable load at distance L.

| 2 Point Loads | | 300 | | 500 | | 700 | | 900 | | 1100 | |
|---------------|-----------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|
| | | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ |
| H_{max} | L_{max} | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| [mm] | [mm] | | | | | | | | | | |
| 2000 | | 2,57 | 1,95 | 1,74 | 1,49 | 1,29 | 1,20 | 1,01 | 1,00 | 0,82 | 0,82 |
| 2500 | | 2,37 | 1,80 | 1,61 | 1,40 | 1,20 | 1,14 | 0,94 | 0,94 | 0,76 | 0,76 |
| 3000 | | 2,20 | 1,44 | 1,50 | 1,32 | 1,12 | 1,08 | 0,88 | 0,88 | 0,71 | 0,71 |
| 3500 | | 2,05 | 1,18 | 1,40 | 1,18 | 1,05 | 1,03 | 0,82 | 0,82 | 0,67 | 0,67 |

F_z [kN] as permanent loads at distance L and L/2; F_x [kN] as variable loads at distance L and L/2.

| 3 Point Loads | | 300 | | 500 | | 700 | | 900 | | 1100 | |
|---------------|-----------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|-----------------------------|---------------------------------------|
| | | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ | $F_{z, perm}$ for $F_x = 0$ | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ |
| H_{max} | L_{max} | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| [mm] | [mm] | | | | | | | | | | |
| 2000 | | 1,87 | 1,37 | 1,28 | 1,06 | 0,95 | 0,86 | 0,74 | 0,72 | 0,60 | 0,60 |
| 2500 | | 1,72 | 1,20 | 1,18 | 0,99 | 0,88 | 0,81 | 0,69 | 0,69 | 0,56 | 0,56 |
| 3000 | | 1,60 | 0,96 | 1,10 | 0,93 | 0,82 | 0,77 | 0,65 | 0,65 | 0,53 | 0,53 |
| 3500 | | 1,49 | 0,79 | 1,03 | 0,79 | 0,77 | 0,73 | 0,61 | 0,61 | 0,49 | 0,49 |


F_z [kN] as permanent loads at distance L, 2*L/3 and L/2; F_x [kN] as variable loads at distance L, 2*L/3 and L/2.

All illustrated structures are able to be installed standing as well.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction; Max. deviation H/100; L/100.

Working loads in accordance with Eurocode 3

Frame F 100/160 - 100

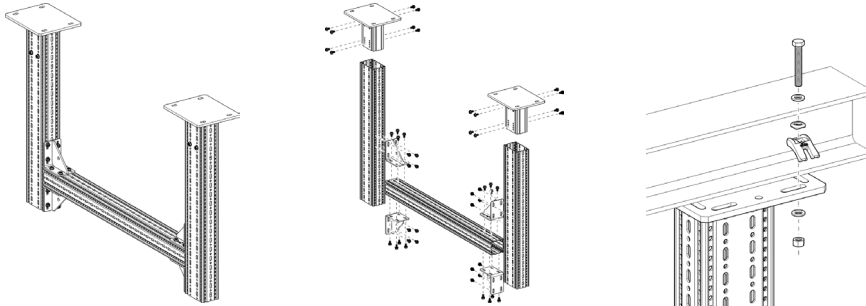

- Part List**
 2 x End Support WBD F 100/160
 2 x Beam Section TP F 100/160
 1 x Beam Section TP F 100
 4 x Corner Bracket WD F 100
 48 x Self-Forming-Screw FLS F

| Distributed Load | L _{max} | | 1500 | | 2000 | | 2500 | | 3000 | | 3500 | | 4000 | |
|------------------|------------------|-------|----------------------|-------------------------------------|----------------------|-------------------------------------|----------------------|-------------------------------------|----------------------|-------------------------------------|----------------------|-------------------------------------|----------------------|-------------------------------------|
| | H _{max} | [mm] | q _{z, perm} | F _z (q _z * L) | q _{z, perm} | F _z (q _z * L) | q _{z, perm} | F _z (q _z * L) | q _{z, perm} | F _z (q _z * L) | q _{z, perm} | F _z (q _z * L) | q _{z, perm} | F _z (q _z * L) |
| | | | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] | [kN/m] | [kN] |
| 1500 | 22,07 | 26,92 | 16,39 | 28,20 | 12,90 | 28,63 | 9,64 | 26,22 | 6,61 | 21,28 | 4,67 | 17,37 | | |
| 2000 | 22,07 | 26,92 | 16,39 | 28,20 | 12,90 | 28,63 | 9,60 | 26,12 | 6,48 | 20,87 | 4,58 | 17,04 | | |
| 2500 | 22,07 | 26,92 | 16,39 | 28,20 | 12,90 | 28,63 | 9,41 | 25,60 | 6,35 | 20,46 | 4,49 | 16,72 | | |
| 3000 | 21,95 | 26,78 | 16,27 | 27,98 | 12,89 | 28,62 | 9,23 | 25,11 | 6,24 | 20,08 | 4,41 | 16,42 | | |
| 3500 | 21,87 | 26,68 | 16,22 | 27,90 | 12,81 | 28,43 | 9,06 | 24,65 | 6,12 | 19,72 | 4,34 | 16,13 | | |

q_z [kN/m] as permanent load over L.

| Point Load | L _{max} | | 1500 | | 2000 | | 2500 | | 3000 | | 3500 | | 4000 | |
|------------|------------------|------|--------------------------|--|--------------------------|--|--------------------------|--|--------------------------|--|--------------------------|--|--------------------------|--|
| | H _{max} | [mm] | F _{z, perm} for | | F _{z, perm} for | | F _{z, perm} for | | F _{z, perm} for | | F _{z, perm} for | | F _{z, perm} for | |
| | | | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z |
| 1500 | 29,43 | 9,89 | 23,20 | 9,82 | 19,25 | 9,75 | 16,51 | 9,68 | 13,39 | 8,88 | 10,73 | 7,91 | | |
| 2000 | 29,20 | 7,57 | 23,03 | 7,51 | 19,12 | 7,45 | 16,41 | 7,39 | 13,15 | 7,29 | 10,55 | 6,76 | | |
| 2500 | 28,96 | 6,13 | 22,85 | 6,09 | 18,98 | 6,04 | 16,29 | 5,99 | 12,91 | 5,94 | 10,37 | 5,68 | | |
| 3000 | 28,72 | 5,16 | 22,67 | 5,12 | 18,83 | 5,09 | 16,17 | 5,04 | 12,69 | 4,95 | 10,19 | 4,77 | | |
| 3500 | 28,49 | 4,40 | 22,49 | 4,37 | 18,69 | 4,32 | 16,00 | 4,25 | 12,48 | 4,16 | 10,03 | 4,05 | | |

F_z [kN] as a permanent load at distance L/2; F_x [kN] as a variable load at distance L/2.


| 2 Point Loads | L _{max} | | 1500 | | 2000 | | 2500 | | 3000 | | 3500 | | 4000 | |
|---------------|------------------|------|--------------------------|--|--------------------------|--|--------------------------|--|--------------------------|--|--------------------------|--|--------------------------|--|
| | H _{max} | [mm] | F _{z, perm} for | | F _{z, perm} for | | F _{z, perm} for | | F _{z, perm} for | | F _{z, perm} for | | F _{z, perm} for | |
| | | | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z | F _x = 0 | F _x = μ ₀ * F _z |
| 1500 | 16,45 | 4,95 | 16,24 | 4,92 | 13,53 | 4,89 | 10,17 | 4,86 | 7,95 | 4,57 | 6,39 | 4,11 | | |
| 2000 | 16,45 | 3,79 | 16,24 | 3,76 | 13,25 | 3,74 | 9,98 | 3,72 | 7,80 | 3,69 | 6,27 | 3,46 | | |
| 2500 | 16,45 | 3,07 | 16,24 | 3,05 | 12,99 | 3,03 | 9,79 | 3,01 | 7,65 | 2,99 | 6,16 | 2,88 | | |
| 3000 | 16,38 | 2,58 | 16,09 | 2,57 | 12,74 | 2,55 | 9,61 | 2,53 | 7,52 | 2,49 | 6,05 | 2,41 | | |
| 3500 | 16,31 | 2,20 | 16,02 | 2,18 | 12,51 | 2,16 | 9,44 | 2,13 | 7,39 | 2,09 | 5,95 | 2,04 | | |

F_z [kN] as permanent loads at distance 2*L/3 and L/3; F_x [kN] as variable loads at distance 2*L/3 and L/3.

| 3 Point Loads | | L_{max} | 1500 | | 2000 | | 2500 | | 3000 | | 3500 | | 4000 | |
|---------------|------|-----------|---------------------|-----------|---------------------|-----------|---------------------|-----------|---------------------|-----------|---------------------|-----------|---------------------|------|
| | | | $F_{z, perm}$ for | | $F_{z, perm}$ for | | $F_{z, perm}$ for | | $F_{z, perm}$ for | | $F_{z, perm}$ for | | $F_{z, perm}$ for | |
| H_{max} | [mm] | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | |
| | | | | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | 1500 | 10,99 | 3,30 | 10,86 | 3,28 | 9,80 | 3,26 | 7,58 | 3,25 | 5,93 | 3,08 | 4,77 | 2,79 | |
| | 2000 | 10,99 | 2,53 | 10,86 | 2,51 | 9,80 | 2,49 | 7,43 | 2,48 | 5,82 | 2,46 | 4,69 | 2,33 | |
| | 2500 | 10,99 | 2,05 | 10,85 | 2,03 | 9,64 | 2,02 | 7,29 | 2,01 | 5,71 | 1,99 | 4,60 | 1,93 | |
| | 3000 | 10,92 | 1,72 | 10,76 | 1,71 | 9,45 | 1,70 | 7,15 | 1,69 | 5,61 | 1,67 | 4,52 | 1,62 | |
| | 3500 | 10,87 | 1,47 | 10,71 | 1,46 | 9,28 | 1,44 | 7,02 | 1,42 | 5,51 | 1,40 | 4,44 | 1,36 | |

F_z [kN] as permanent loads at distance $3*L/4$, $L/2$ and $L/4$; F_x [kN] as variable loads at distance $3*L/4$, $L/4$ and $L/4$.

For assembly with STA F 100 - 100/160 F_z has to be reduced by the reduction ratio F_a .

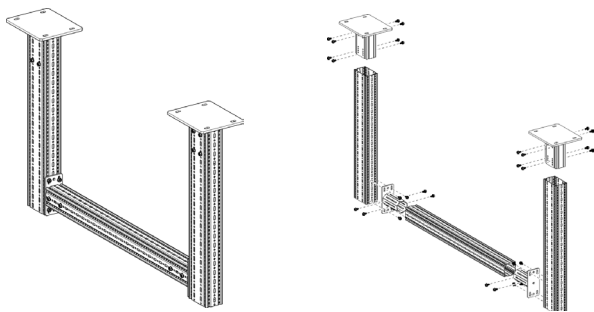

Part List

- 2 x End Support WBD F 100/160
- 2 x Beam Section TP F 100/160
- 1 x Beam Section TP F 100
- 2 x End Support STA F 100
- 32 x Self-Forming-Screw FLS F

| L (mm) | Reduction ratio F_a [%] | |
|--------|---------------------------|-------------------|
| | $F_x = 0$ | $F_x = 0,2 * F_z$ |
| 1500 | -15% | 0% |
| 2000 | -25% | 0% |
| 2500 | -30% | 0% |
| 3000 | -30% | 0% |
| 3500 | -35% | -5% |

All illustrated structures are able to be installed standing as well.

Friction coefficient $\mu_0 = 0,2$ for friction in longitudinal direction; Max. deviation $H/100$; Max. bending $L/200$.

Working loads in accordance with Eurocode 3

Beam Section 100

| L_{max} [mm] | $F_{z, perm}$ [kN] |
|-------------------|-----------------------|
| 1000 | 50,0 |
| 1600 | 31,0 |
| 2000 | 24,5 |
| 3000 | 15,0 |
| 4000 | 10,5 |
| 5000 | 7,8 |
| 6000 | 5,9 |

Part List
Sikla-Beam Section H100

F_z [kN] as a permanent load at L/2; Max. bending L/150.

L-Construction 100

| H_{max} [mm] | L_{max} | $F_{z, perm}$ for | | $F_{z, perm}$ for | | $F_{z, perm}$ for | |
|-------------------|-----------|-------------------|-----------------------------|-------------------|-----------------------------|-------------------|-----------------------------|
| | | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| 500 | 200 | 4,35 | 1,73 | 1,56 | 0,64 | 0,93 | 0,38 |
| 1000 | 600 | 4,35 | 0,75 | 1,56 | 0,31 | 0,90 | 0,18 |
| 1500 | 1000 | 4,35 | 0,40 | 1,36 | 0,18 | 0,80 | 0,11 |

F_z [kN] as a permanent load, F_x [kN] as a variable load, max. deviation H/150; L/150; Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

Part List
2 x Beam Bracket TKO 100
1 x Bracket Plates FV 100/120

Frame 100

| H_{max} [mm] | L_{max} | $F_{z, perm}$ for | | $F_{z, perm}$ for | | $F_{z, perm}$ for | |
|-------------------|-----------|-------------------|-----------------------------|-------------------|-----------------------------|-------------------|-----------------------------|
| | | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| 500 | 500 | 16,5 | 15,1 | 16,4 | 15,0 | 16,3 | 9,9 |
| 1000 | 1000 | 16,5 | 15,1 | 16,4 | 15,0 | 16,3 | 9,9 |
| 1500 | 2000 | 16,5 | 15,1 | 16,4 | 15,0 | 16,3 | 9,9 |

F_z [kN] as a permanent load, F_x [kN] as a variable load; Max. bending L/150, max. deviation H/150; Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

Part List
3 x Beam Bracket TKO 100
1 x End Support STA 100
1 x Bracket Plates FV 100/120

T-Support 100

| H_{max} [mm] | $F_{z, perm}$ for | |
|-------------------|-------------------|-----------------------------|
| | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| 200 | 13,0 | 13,0 |
| 600 | 13,0 | 13,0 |
| 1000 | 13,0 | 13,0 |
| 1400 | 13,0 | 13,0 |
| 2000 | 13,0 | 9,5 |

F_z [kN] as a permanent load; F_x [kN] as a variable load, max. deviation H/150; central load introduction for planned eccentricity ± 50 mm; Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

Part List
1 x Beam Bracket TKO
1 x T-Adapter TA 100

Working loads in accordance with Eurocode 3

| Beam Section 100 | L_{max} | $F_{z, perm}$ |
|------------------|-----------|---------------|
| | [mm] | [kN] |
| | 1000 | 50,0 |
| | 1600 | 31,0 |
| | 2000 | 24,5 |
| | 3000 | 15,0 |
| | 4000 | 10,5 |
| | 5000 | 7,8 |
| | 6000 | 5,9 |

Part List
Sikla-Beam Section H100

F_z [kN] as a permanent load at L/2, Max. bending L/150.

| L-Construction 100 | L_{max} | 200 | | 600 | | 1000 | |
|--------------------|-------------|-------------------|---------------------|-------------------|---------------------|-------------------|---------------------|
| | | $F_{z, perm}$ for | | $F_{z, perm}$ for | | $F_{z, perm}$ for | |
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | H_{max} | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | [mm] | | | | | | |
| | 500 | 3,51 | 3,22 | 2,67 | 1,54 | 2,13 | 0,95 |
| | 1000 | 3,51 | 0,96 | 2,67 | 0,43 | 2,13 | 0,27 |
| 1500 | 3,51 | 0,46 | 2,59 | 0,22 | 1,79 | 0,14 | |

Part List
2 x Beam Bracket TKO 100
1 x Assembly Set MS 5P M12 S

F_z [kN] as a permanent load, F_x [kN] as a variable load; max. deviation H/150; L/150;
Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

| Frame 100 | L_{max} | 500 | | 1000 | | 2000 | |
|-----------|------------|-------------------|---------------------|-------------------|---------------------|-------------------|---------------------|
| | | $F_{z, perm}$ for | | $F_{z, perm}$ for | | $F_{z, perm}$ for | |
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | H_{max} | [kN] | [kN] | [kN] | [kN] | [kN] | [kN] |
| | [mm] | | | | | | |
| | 500 | 8,2 | 8,0 | 8,1 | 7,9 | 8,0 | 7,8 |
| | 1000 | 8,2 | 8,0 | 8,1 | 7,9 | 8,0 | 7,8 |
| 1500 | 8,2 | 8,0 | 8,1 | 7,9 | 8,0 | 7,8 | |

Part List
3 x Beam Bracket TKO 100
1 x End Support STA 100
2 x Assembly Set MS 5P M12 S

F_z [kN] as a permanent load, F_x [kN] as a variable load;
Max. bending L/150, max. deviation H/150;
Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

| T-Support 100 | H_{max} | $F_{z, perm}$ for | |
|---------------|-----------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | [mm] | [kN] | [kN] |
| | 200 | 13,0 | 13,0 |
| | 600 | 13,0 | 13,0 |
| | 1000 | 13,0 | 13,0 |
| | 1400 | 13,0 | 13,0 |
| | 2000 | 13,0 | 9,5 |

Part List
1 x Beam Bracket TKO 100
1 x T-Adapter TA 100

F_z [kN] as a permanent load; F_x [kN] as a variable load, max. deviation H/150;
central load introduction for planned eccentricity ± 50 mm;
Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

Working loads in accordance with Eurocode 3

Beam Bracket 100

Part List
1 Beam Bracket TKO 120

| L_{max} [mm] | $F_{z, perm}$ for | |
|--|-------------------|-----------------------------|
| | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| Connection with Assembly Set MS 5P M12 S | | |
| 200 | 3,51 | 3,22 |
| 400 | 3,03 | 2,62 |
| 600 | 2,67 | 2,21 |
| 800 | 2,37 | 1,90 |
| 1000 | 2,13 | 1,67 |
| 1400 | 1,76 | 1,33 |
| 2000 | 1,36 | 0,99 |

F_z [kN] as a permanent load, F_x [kN] as a variable load; Max. bending $L/150$.

Joining Beam Bracket 100

Part List
1 x Joining Beam Bracket QKOq

| L_{max} [mm] | $F_{z, perm}$ for | |
|--|-------------------|-----------------------------|
| | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| Connection with Assembly Set MS 5P M12 S / M16 S | | |
| 300 | 0,62 | 0,61 |
| 500 | 0,37 | 0,36 |
| 700 | 0,24 | 0,24 |
| Connection with Bracket Plates | | |
| 300 | 1,48 | 1,48 |
| 500 | 0,93 | 0,93 |
| 700 | 0,66 | 0,66 |

F_z [kN] as a permanent load, F_x [kN] as a variable load, max. deviation $L/150$;
Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

Angled Beam Bracket 100

Part List
1 x Beam Bracket TKO 100
1 x Angled Beam Bracket SKO 100
2 x Assembly Set MS 5P M12 S
1 x Bracket Plates FV 100/120

| L_{max} [mm] | $F_{z, perm}$ for | |
|---|-------------------|-----------------------------|
| | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| Inclined to the horizontal Bracket with 30° | | |
| 1000 | 2,70 | 2,70 |
| 678 | 4,00 | 4,00 |

F_z [kN] as a permanent load, F_x [kN] as a variable load, Max. bending $L/150$;
Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

Working loads in accordance with Eurocode 3

Beam Section 120

Part List
Sikla-Beam Section H120

| L_{max} [mm] | $F_{z, perm}$ [kN] |
|-------------------|-----------------------|
| 1000 | 98,5 |
| 1600 | 61,5 |
| 2000 | 49,5 |
| 3000 | 31,5 |
| 4000 | 22,3 |
| 5000 | 16,8 |
| 6000 | 13,0 |

F_z [kN] as a permanent load at L/2; Max. bending L/150.

L-Construction 120

Part List
2 x Beam Bracket TKO 120
1 x Bracket Plates FV 100/120

| L_{max} H_{max} [mm] | 200 | | 600 | | 1000 | |
|--------------------------------|--|--|--|--|--|--|
| | $F_{z, perm}$ for $F_x = 0$ [kN] | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ [kN] | $F_{z, perm}$ for $F_x = 0$ [kN] | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ [kN] | $F_{z, perm}$ for $F_x = 0$ [kN] | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ [kN] |
| 500 | 4,35 | 2,43 | 1,59 | 0,85 | 0,96 | 0,50 |
| 1000 | 4,35 | 1,45 | 1,59 | 0,57 | 0,96 | 0,34 |
| 1500 | 4,35 | 0,88 | 1,59 | 0,40 | 0,96 | 0,24 |

F_z [kN] as a permanent load, F_x [kN] as a variable load, max. deviation H/150; L/150;
Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

Frame 120

Part List
3 x Beam Bracket TKO 120
1 x End Support STA 120
1 x Bracket Plates FV 100/120

| L_{max} H_{max} [mm] | 500 | | 1000 | | 2000 | |
|--------------------------------|--|--|--|--|--|--|
| | $F_{z, perm}$ for $F_x = 0$ [kN] | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ [kN] | $F_{z, perm}$ for $F_x = 0$ [kN] | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ [kN] | $F_{z, perm}$ for $F_x = 0$ [kN] | $F_{z, perm}$ for $F_x = \mu_0 * F_z$ [kN] |
| 500 | 16,5 | 15,1 | 16,3 | 14,9 | 16,1 | 14,7 |
| 1000 | 16,5 | 15,1 | 16,3 | 14,9 | 16,1 | 14,7 |
| 1500 | 16,5 | 15,1 | 16,3 | 14,9 | 16,1 | 14,7 |

F_z [kN] as a permanent load, F_x [kN] as a variable load;
Max. bending L/150, max. deviation H/150;
Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

T-Support 120

Part List
1 x Beam Bracket TKO 120
1 x T-Adapter TA 120

| H_{max} [mm] | $F_{z, perm}$ for | |
|-------------------|-------------------|-----------------------------|
| | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| 200 | 23,6 | 23,6 |
| 600 | 23,6 | 23,6 |
| 1000 | 23,6 | 23,6 |
| 1400 | 23,6 | 21,6 |
| 2000 | 23,6 | 15,9 |

F_z [kN] as a permanent load; F_x [kN] as a variable load, max. deviation H/150;
central load introduction for planned eccentricity ± 50 mm;
Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

Working loads in accordance with Eurocode 3

Beam Section 120

Part List
Sikla-Beam Section H120

| L_{max} [mm] | $F_{z, perm}$ [kN] |
|-------------------|-----------------------|
| 1000 | 98,5 |
| 1600 | 61,5 |
| 2000 | 49,5 |
| 3000 | 31,5 |
| 4000 | 22,3 |
| 5000 | 16,8 |
| 6000 | 13,0 |

F_z [kN] as a permanent load at L/2; Max. bending L/150.

L-Construction 120

Part List
2 x Beam Bracket TKO 120
1 x Assembly Set MS 5P M12 S

| H_{max} [mm] | L_{max} | $F_{z, perm}$ for | | $F_{z, perm}$ for | | $F_{z, perm}$ for | |
|-------------------|-----------|-------------------|---------------------|-------------------|---------------------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | 200 | | | | | | |
| | 600 | | | | | | |
| | 1000 | | | | | | |
| 500 | | 3,61 | 3,35 | 2,86 | 2,41 | 2,34 | 1,86 |
| 1000 | | 3,61 | 2,59 | 2,86 | 1,23 | 2,34 | 0,78 |
| 1500 | | 3,61 | 1,18 | 2,86 | 0,62 | 2,34 | 0,39 |

F_z [kN] as a permanent load, F_x [kN] as a variable load, max. deviation H/150; L/150; Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

Frame 120

Part List
3 x Beam Bracket TKO 120
1 x End Support STA 120
2 x Assembly Set MS 5P M12 S

| H_{max} [mm] | L_{max} | $F_{z, perm}$ for | | $F_{z, perm}$ for | | $F_{z, perm}$ for | |
|-------------------|-----------|-------------------|---------------------|-------------------|---------------------|-------------------|---------------------|
| | | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ | $F_x = 0$ | $F_x = \mu_0 * F_z$ |
| | 500 | | | | | | |
| | 1000 | | | | | | |
| | 2000 | | | | | | |
| 500 | | 8,2 | 8,0 | 8,0 | 7,8 | 7,8 | 7,6 |
| 1000 | | 8,2 | 8,0 | 8,0 | 7,8 | 7,8 | 7,6 |
| 1500 | | 8,2 | 8,0 | 8,0 | 7,8 | 7,8 | 7,6 |

F_z [kN] as a permanent load, F_x [kN] as a variable load; Max. bending L/150, max. deviation H/150; Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

T-Support 120


Part List
1 x Beam Bracket TKO 120
1 x T-Adapter TA 120

| H_{max} [mm] | $F_{z, perm}$ for | |
|-------------------|-------------------|-----------------------------|
| | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| 200 | 23,6 | 23,6 |
| 600 | 23,6 | 23,6 |
| 1000 | 23,6 | 23,6 |
| 1400 | 23,6 | 21,6 |
| 2000 | 23,6 | 15,9 |

F_z [kN] as a permanent load; F_x [kN] as a variable load, max. deviation H/150; central load introduction for planned eccentricity ± 50 mm; Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

Working loads in accordance with Eurocode 3

Beam Bracket 120

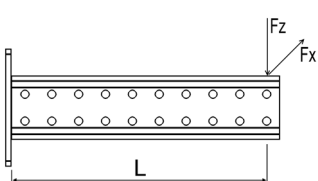


Part List
1 Beam Bracket TKO 120

| L_{max} [mm] | $F_{z, perm}$ for | |
|--|-------------------|-----------------------------|
| | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| Connection with Assembly Set MS 5P M12 S | | |
| 200 | 3,61 | 3,35 |
| 400 | 3,20 | 2,81 |
| 600 | 2,86 | 2,41 |
| 800 | 2,57 | 2,10 |
| 1000 | 2,34 | 1,86 |
| 1400 | 1,95 | 1,49 |
| 2000 | 1,52 | 1,12 |

F_z [kN] as a permanent load, F_x [kN] as a variable load, Max. bending $L/150$.

Joining Beam Bracket 120

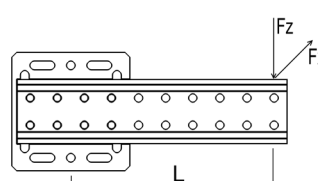


Part List
1 x Joining Beam Bracket QKOq

| L_{max} [mm] | $F_{z, perm}$ for | |
|--|-------------------|-----------------------------|
| | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| Connection with Assembly Set MS 5P M12 S / M16 S | | |
| 300 | 0,72 | 0,69 |
| 500 | 0,44 | 0,40 |
| 700 | 0,29 | 0,25 |
| Connection with Bracket Plates | | |
| 300 | 1,46 | 1,46 |
| 500 | 0,90 | 0,90 |
| 700 | 0,62 | 0,62 |

F_z [kN] as a permanent load, F_x [kN] as a variable load, max. deviation $L/150$;
Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).


Angled Beam Bracket 120

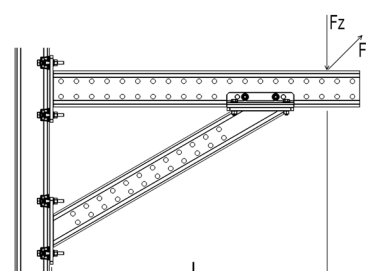


Part List
1 x Beam Bracket TKO 120
1 x Angled Beam Bracket SKO 100
2 x Assembly Set MS 5P M12 S
1 x Bracket Plates FV 100/120

| L_{max} [mm] | $F_{z, perm}$ for | |
|---|-------------------|-----------------------------|
| | $F_x = 0$ [kN] | $F_x = \mu_0 * F_z$ [kN] |
| Inclined to the horizontal Bracket with 30° | | |
| 1000 | 2,70 | 2,70 |
| 678 | 4,00 | 4,00 |


F_z [kN] as a permanent load, F_x [kN] as a variable load, Max. bending $L/150$;
Friction coefficient $\mu_0 = 0,2$ (for friction in longitudinal direction).

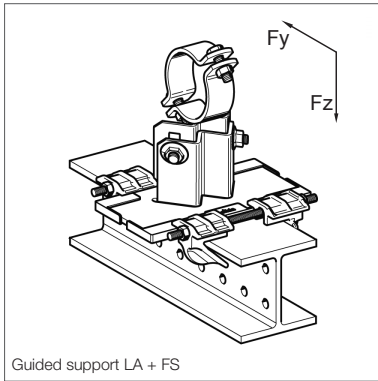


Guided support LA + FS

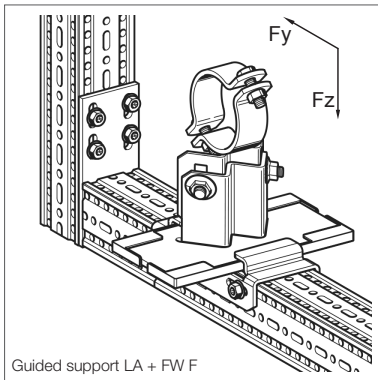

Guided support LA + FW F

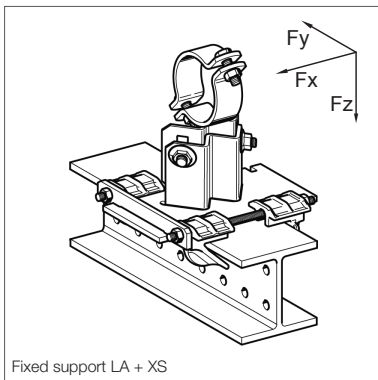

Fixed support LA + XS

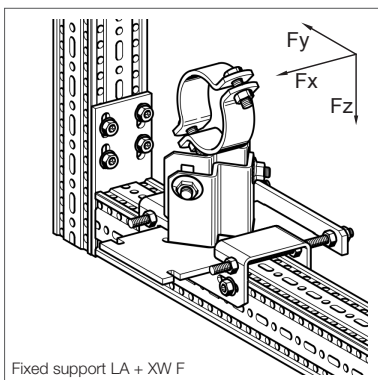


Fixed support LA + XW F

Working loads for Pipe Shoes LA, LC and LD - HV

Basis of assessment EC 3, working loads for Pipe Shoes as delivered

Pipe Shoe LA - HV + Guiding Set FS resp. Fixed Point Set XS





Pipe Shoe LA - HV + Guiding Bracket FW F resp. Fixed Point Bracket XW F




| Height | DN | F_x [kN] only for fixed supports | F_y [kN] | $+ F_z$ [kN] | $- F_z$ FS 80/120 [kN] | $- F_z$ FW F [kN] | $- F_z$ XS 80/120 [kN] | $- F_z$ XW F [kN] |
|--------|------|---|---------------|-----------------|---------------------------------|-------------------------|------------------------------|-------------------------|
| 90 | ≤ 25 | 9,1 | 5,2 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 90 | 32 | 8,8 | 4,9 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 90 | 40 | 8,6 | 4,8 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 90 | 50 | 8,2 | 4,4 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 90 | 65 | 7,7 | 3,9 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 90 | 80 | 7,3 | 3,6 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 90 | 100 | 6,5 | 2,8 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 90 | 125 | 5,7 | 2,1 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 90 | 150 | 4,7 | 1,3 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 150 | ≤ 25 | 8,0 | 4,2 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 150 | 32 | 7,9 | 3,9 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 150 | 40 | 7,8 | 3,9 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 150 | 50 | 7,6 | 3,6 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 150 | 65 | 7,4 | 3,2 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 150 | 80 | 7,2 | 3,0 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 150 | 100 | 6,9 | 2,5 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 150 | 125 | 6,5 | 2,0 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 150 | 150 | 6,1 | 1,4 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 200 | ≤ 25 | 6,3 | 3,6 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 200 | 32 | 6,2 | 3,5 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 200 | 40 | 6,2 | 3,4 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 200 | 50 | 6,0 | 3,2 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 200 | 65 | 5,9 | 3,0 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 200 | 80 | 5,7 | 2,8 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 200 | 100 | 5,5 | 2,4 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 200 | 125 | 5,2 | 2,0 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |
| 200 | 150 | 4,9 | 1,6 | 15,4 | 14 | 6,1 | 15,4 | 15,4 |



Supports (Pipe Shoes)

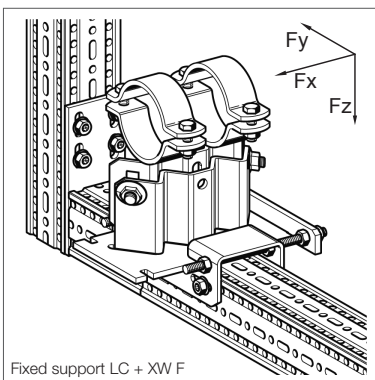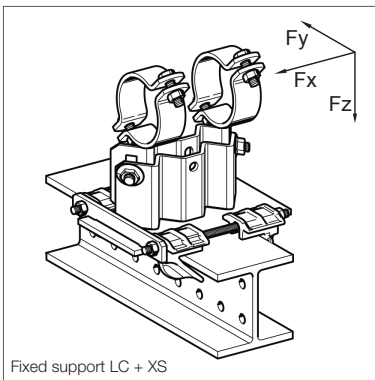
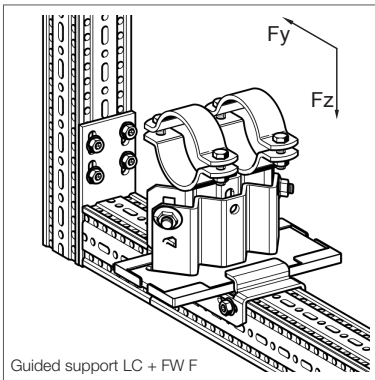
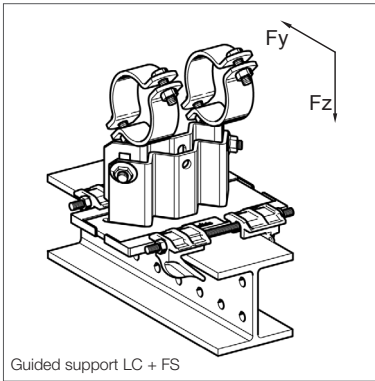


Pipe Shoe LC - HV + Guiding Set FS resp. Fixed Point Set XS Pipe Shoe LC - HV + Guiding Bracket FW F resp. Fixed Point Bracket XW F




| Height | DN | F_x [kN] only for fixed supports | F_y [kN] | $+ F_z$ [kN] | $- F_z$ FS 80/120 [kN] | $- F_z$ FW F [kN] | $- F_z$ XS 80/120 [kN] | $- F_z$ XW F [kN] |
|--------|------|---|---------------|-----------------|------------------------------|-------------------------|------------------------------|-------------------------|
| 90 | ≤ 25 | 14,3 | 6,3 | 17,0 | 14 | 6,1 | 17 | 17 |
| 90 | 32 | 14,1 | 6,2 | 17,0 | 14 | 6,1 | 17 | 17 |
| 90 | 40 | 14,0 | 6,1 | 17,0 | 14 | 6,1 | 17 | 17 |
| 90 | 50 | 13,9 | 5,9 | 17,0 | 14 | 6,1 | 17 | 17 |
| 90 | 65 | 13,6 | 5,6 | 17,0 | 14 | 6,1 | 17 | 17 |
| 90 | 80 | 13,5 | 5,4 | 17,0 | 14 | 6,1 | 17 | 17 |
| 90 | 100 | 13,1 | 5,0 | 17,0 | 14 | 6,1 | 17 | 17 |
| 90 | 125 | 12,7 | 4,5 | 17,0 | 14 | 6,1 | 17 | 17 |
| 90 | 150 | 12,3 | 4,0 | 17,0 | 14 | 6,1 | 17 | 17 |
| 90 | 200 | 11,6 | 3,2 | 17,0 | 14 | 6,1 | 17 | 17 |
| 90 | 250 | 10,8 | 2,3 | 17,0 | 14 | 6,1 | 17 | 17 |
| 90 | 300 | 10,1 | 1,5 | 17,0 | 14 | 6,1 | 17 | 17 |
| 150 | ≤ 25 | 8,5 | 4,9 | 17,0 | 14 | 6,1 | 17 | 17 |
| 150 | 32 | 8,5 | 4,8 | 17,0 | 14 | 6,1 | 17 | 17 |
| 150 | 40 | 8,5 | 4,7 | 17,0 | 14 | 6,1 | 17 | 17 |
| 150 | 50 | 8,4 | 4,6 | 17,0 | 14 | 6,1 | 17 | 17 |
| 150 | 65 | 8,4 | 4,4 | 17,0 | 14 | 6,1 | 17 | 17 |
| 150 | 80 | 8,4 | 4,3 | 17,0 | 14 | 6,1 | 17 | 17 |
| 150 | 100 | 8,3 | 4,0 | 17,0 | 14 | 6,1 | 17 | 17 |
| 150 | 125 | 8,3 | 3,7 | 17,0 | 14 | 6,1 | 17 | 17 |
| 150 | 150 | 8,2 | 3,3 | 17,0 | 14 | 6,1 | 17 | 17 |
| 150 | 200 | 8,1 | 2,7 | 17,0 | 14 | 6,1 | 17 | 17 |
| 150 | 250 | 8,0 | 2,1 | 17,0 | 14 | 6,1 | 17 | 17 |
| 150 | 300 | 7,9 | 1,5 | 17,0 | 14 | 6,1 | 17 | 17 |
| 200 | ≤ 25 | 7,3 | 5,3 | 17,0 | 14 | 6,1 | 17 | 17 |
| 200 | 32 | 7,2 | 5,2 | 17,0 | 14 | 6,1 | 17 | 17 |
| 200 | 40 | 7,2 | 5,1 | 17,0 | 14 | 6,1 | 17 | 17 |
| 200 | 50 | 7,1 | 4,9 | 17,0 | 14 | 6,1 | 17 | 17 |
| 200 | 65 | 7,0 | 4,7 | 17,0 | 14 | 6,1 | 17 | 17 |
| 200 | 80 | 6,9 | 4,6 | 17,0 | 14 | 6,1 | 17 | 17 |
| 200 | 100 | 6,7 | 4,3 | 17,0 | 14 | 6,1 | 17 | 17 |
| 200 | 125 | 6,5 | 4,0 | 17,0 | 14 | 6,1 | 17 | 17 |
| 200 | 150 | 6,3 | 3,6 | 17,0 | 14 | 6,1 | 17 | 17 |
| 200 | 200 | 5,9 | 3,0 | 17,0 | 14 | 6,1 | 17 | 17 |
| 200 | 250 | 5,5 | 2,3 | 17,0 | 14 | 6,1 | 17 | 17 |
| 200 | 300 | 5,1 | 1,7 | 17,0 | 14 | 6,1 | 17 | 17 |



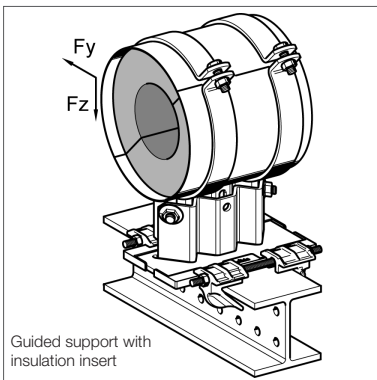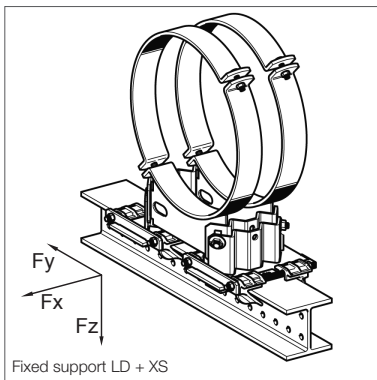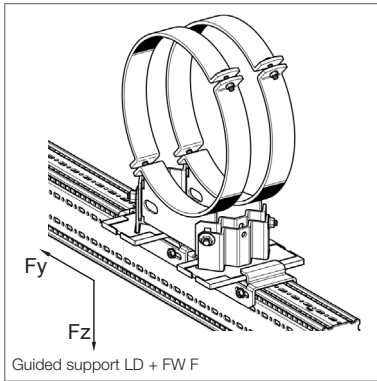

Pipe Shoe LD - HV + 2 x Guiding Set FS resp. 2 x Fixed Point Set XS
Pipe Shoe LD - HV + 2 x Guiding Bracket FW F resp. 2 x Fixed Point Bracket XW F




| Height | DN | F_x [kN] only for fixed supports | F_y [kN] | $+ F_z$ [kN] | $- F_z$ FS 80/120 [kN] | $- F_z$ FW F [kN] | $- F_z$ XS 80/120 [kN] | $- F_z$ XW F [kN] |
|--------|-------|---|---------------|-----------------|---------------------------------|-------------------------|------------------------------|-------------------------|
| 90 | ≤ 350 | 25,0 | 13,1 | 32,8 | 28 | 12,2 | 32,8 | 32,8 |
| 90 | 400 | 22,5 | 11,9 | 32,8 | 28 | 12,2 | 32,8 | 32,8 |
| 90 | 500 | 20,8 | 9,4 | 32,8 | 28 | 12,2 | 32,8 | 32,8 |
| 90 | 600 | 10,3 | 7,2 | 32,8 | 28 | 12,2 | 32,8 | 32,8 |
| 150 | ≤ 350 | 25,0 | 12,9 | 32,8 | 28 | 12,2 | 32,8 | 32,8 |
| 150 | 400 | 22,5 | 11,5 | 32,8 | 28 | 12,2 | 32,8 | 32,8 |
| 150 | 500 | 17,3 | 8,8 | 32,8 | 28 | 12,2 | 32,8 | 32,8 |
| 150 | 600 | 8,7 | 6,3 | 32,8 | 28 | 12,2 | 32,8 | 32,8 |
| 200 | ≤ 350 | 25,0 | 11,3 | 32,8 | 28 | 12,2 | 32,8 | 32,8 |
| 200 | 400 | 20,5 | 10,2 | 32,8 | 28 | 12,2 | 32,8 | 32,8 |
| 200 | 500 | 15,7 | 8,1 | 32,8 | 28 | 12,2 | 32,8 | 32,8 |
| 200 | 600 | 7,5 | 6,1 | 32,8 | 28 | 12,2 | 32,8 | 32,8 |

Working loads for Supports with insulation insert and suspension

Basis of assessment EC 3, working loads for supports as delivered

Pipe Shoe LK - HV + Guiding Set FS

| Height | DN | F_y [kN] | $+ F_z$ [kN] |
|--------|-----|---------------|-----------------|
| 150 | 25 | 3,1 | 3,1 |
| 150 | 32 | 3,8 | 3,8 |
| 150 | 40 | 4,3 | 4,3 |
| 150 | 50 | 4,0 | 3,9 |
| 150 | 65 | 2,8 | 2,8 |
| 150 | 80 | 2,5 | 2,4 |
| 150 | 100 | 4,5 | 17,0 |
| 150 | 125 | 4,1 | 17,0 |
| 150 | 150 | 3,6 | 17,0 |
| 150 | 200 | 2,8 | 17,0 |
| 150 | 250 | 1,9 | 17,0 |
| 150 | 300 | 0,4 | 17,0 |

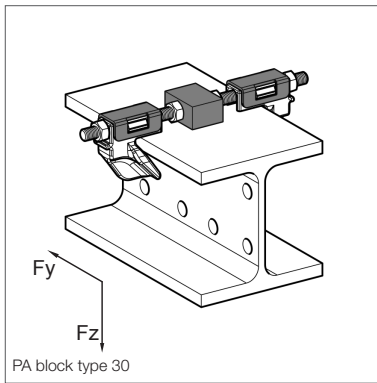


Working loads for sliding supports LR - H 20, guided supports FR - H 20 and fixed points XR - H 20


Design according to EN 13480-3 Annex J

Sliding support LR - 20 with slide bar type 30 and type 100


| DN | + F _z [kN] |
|-----|-----------------------|
| 15 | 4,5 |
| 20 | 4,5 |
| 25 | 4,5 |
| 32 | 4,5 |
| 40 | 4,5 |
| 50 | 4,5 |
| 65 | 9,0 |
| 80 | 9,0 |
| 100 | 9,0 |
| 125 | 9,0 |
| 150 | 9,0 |
| 175 | 9,0 |
| 200 | 9,0 |
| 225 | 9,0 |
| 250 | 9,0 |
| 300 | 9,0 |


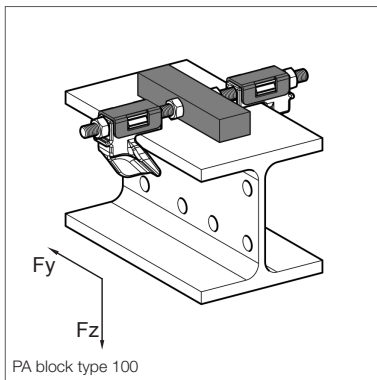


Guided support FR - H 20

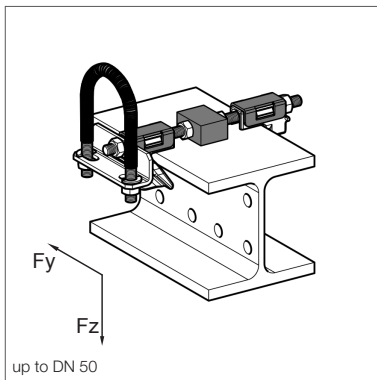


| DN | F _y [kN] | + F _z [kN] | - F _z [kN] |
|-----|---------------------|-----------------------|-----------------------|
| 15 | 0,2 | 4,5 | 0,2 |
| 20 | 0,2 | 4,5 | 0,2 |
| 25 | 0,2 | 4,5 | 0,2 |
| 32 | 0,2 | 4,5 | 0,2 |
| 40 | 0,2 | 4,5 | 0,2 |
| 50 | 0,2 | 4,5 | 0,2 |
| 65 | 0,9 | 9,0 | 1,1 |
| 80 | 0,9 | 9,0 | 1,1 |
| 100 | 0,9 | 9,0 | 1,1 |
| 125 | 0,9 | 9,0 | 1,1 |
| 150 | 0,9 | 9,0 | 1,1 |
| 175 | 0,9 | 9,0 | 1,1 |
| 200 | 0,9 | 9,0 | 1,1 |
| 225 | 0,9 | 9,0 | 1,1 |
| 250 | 0,9 | 9,0 | 1,1 |
| 300 | 0,9 | 9,0 | 1,1 |

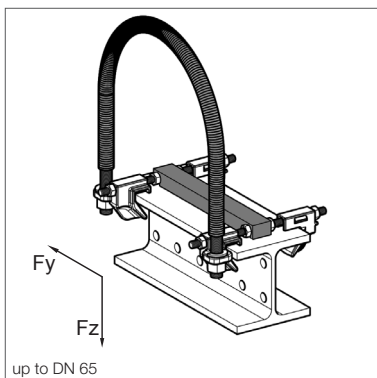

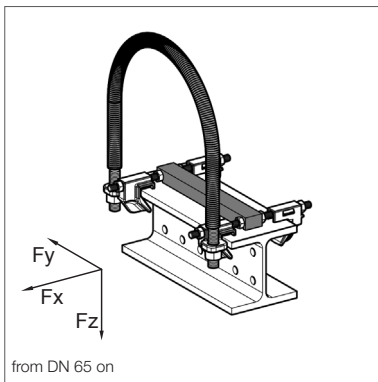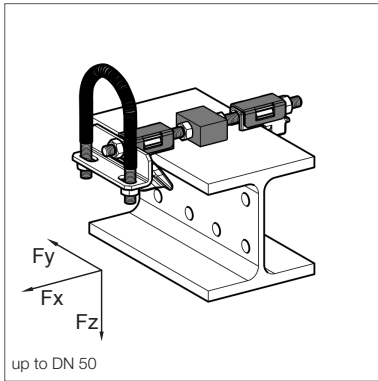

Fixed points XR - H 20

| DN | F_x [kN] | F_y [kN] | + F_z [kN] | - F_z [kN] |
|-----|---------------|---------------|-----------------|-----------------|
| 15 | 0,5 | 0,2 | 4,5 | 0,2 |
| 20 | 0,5 | 0,2 | 4,5 | 0,2 |
| 25 | 0,5 | 0,2 | 4,5 | 0,2 |
| 32 | 0,5 | 0,2 | 4,5 | 0,2 |
| 40 | 0,5 | 0,2 | 4,5 | 0,2 |
| 50 | 0,5 | 0,2 | 4,5 | 0,2 |
| 65 | 0,3 | 0,9 | 9,0 | 1,1 |
| 80 | 0,3 | 0,9 | 9,0 | 1,1 |
| 100 | 0,3 | 0,9 | 9,0 | 1,1 |
| 125 | 0,3 | 0,9 | 9,0 | 1,1 |
| 150 | 0,3 | 0,9 | 9,0 | 1,1 |
| 175 | 0,3 | 0,9 | 9,0 | 1,1 |
| 200 | 0,3 | 0,9 | 9,0 | 1,1 |
| 225 | 0,3 | 0,9 | 9,0 | 1,1 |
| 250 | 0,3 | 0,9 | 9,0 | 1,1 |
| 300 | 0,3 | 0,9 | 9,0 | 1,1 |

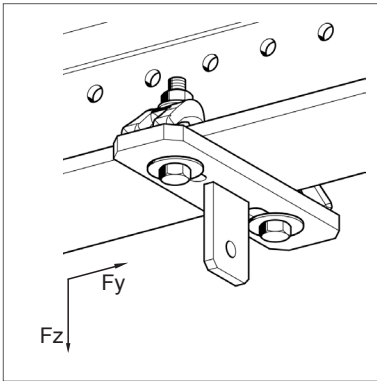


Working loads for Rod Hangers

Design according to EN 13480-3 Annex J

Working loads valid for up to 4 degrees Load Chain inclination.

Beam system Eye-Plate HP 80/99


| Type | F_z [kN] |
|------|---------------|
| M10 | 11,2 |
| M12 | 12,1 |
| M16 | 12,5 |

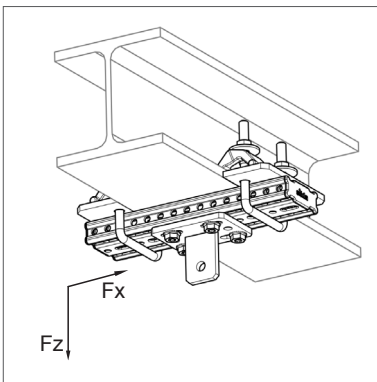

Rod hanger beam connection LKA


| Trägerbreite 100-199 mm | |
|----------------------------|---------------|
| Type | F_z [kN] |
| M10 | 10,9 |
| M12 | 11,5 |
| M16 | 12,1 |

| Trägerbreite 200-310 mm | |
|----------------------------|---------------|
| Type | F_z [kN] |
| M10 | 10,8 |
| M12 | 11,3 |
| M16 | 11,9 |

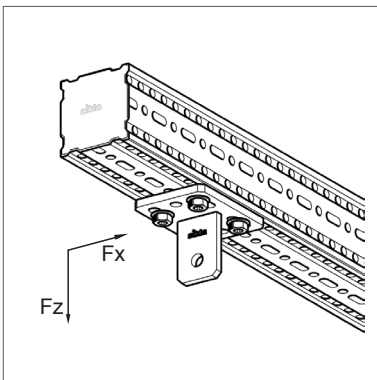


siFramo Eye-Plate HP F 80 siFramo Eye-Plate HP F 100

| Type | F_z [kN] |
|------|---------------|
| M10 | 11,2 |
| M12 | 12,1 |
| M16 | 12,5 |

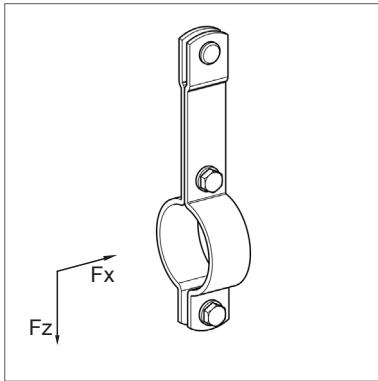


Pipe Clamp Stabil Form C LK

| Beam width 100-199 mm | |
|--------------------------|---------------|
| DN | F_z [kN] |
| 15 | 4,0 |
| 20 | 4,0 |
| 25 | 4,0 |
| 32 | 4,0 |
| 40 | 4,0 |
| 50 | 4,0 |
| 65 | 4,0 |
| 80 | 4,0 |
| 100 | 4,0 |
| 125 | 5,4 |
| 150 | 5,4 |
| 175 | 5,4 |
| 200 | 9,3 |
| 250 | 9,3 |
| 300 | 9,3 |

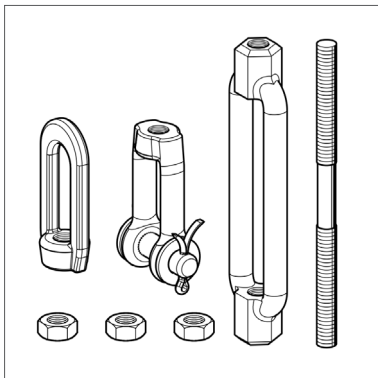

Rod Hanger Load Chain Assembly LKV

| Type | F_z [kN] |
|------|---------------|
| M10 | 11,2 |
| M12 | 12,1 |
| M16 | 14,0 |

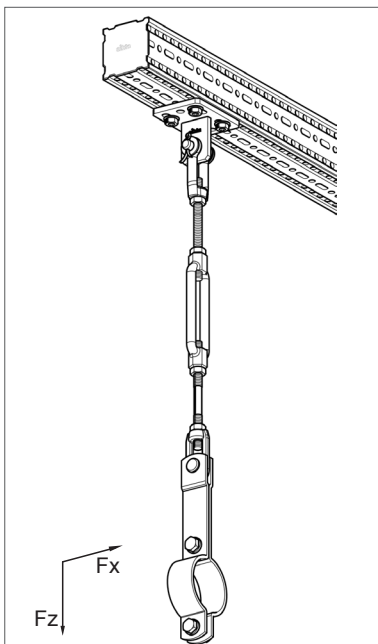

Supports (Pipe Shoes)

Application


The Sikla height- adjustable Supports (Pipe Shoes; HV 90, HV 150, HV 200) can be used as a Skid, a Guide or as a Fixed Point. The testing process of the individual Support types and the determination of the direction dependent permissible loads was carried out by the independent testing house TÜV Rheinland (Report No. 69617494/01).

Conformity

The Sikla Simotec Supports (Pipe Shoes) therefore fulfill DIN EN 13480-3 : 2012-11, where particularly in section 13.3.6.1 it is highlighted that the design of Pipe Support components is in accordance with DIN EN 1993.





For every Pipe Support type (incl. required connection kit) a declaration of conformity could be issued in accordance with ISO / IEC 17050.

Installation



Special bolts for height- adjustable connection of lower and upper Pipe Shoe components.
Tightening torque: 80 Nm

By combining **Pipe Shoe LA or LC** with the steel supporting structure and connecting parts below, it is possible to create a guided pipe shoe or a fixed point pipe shoe:

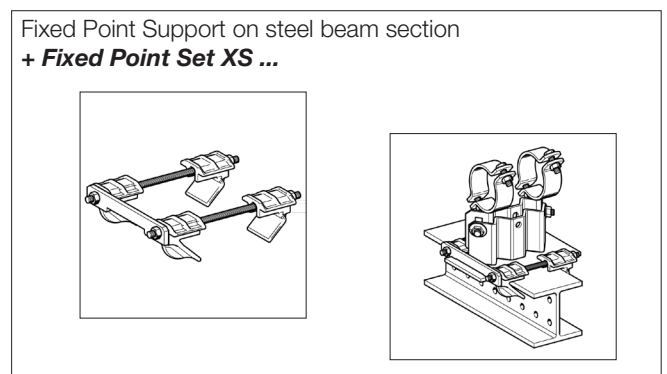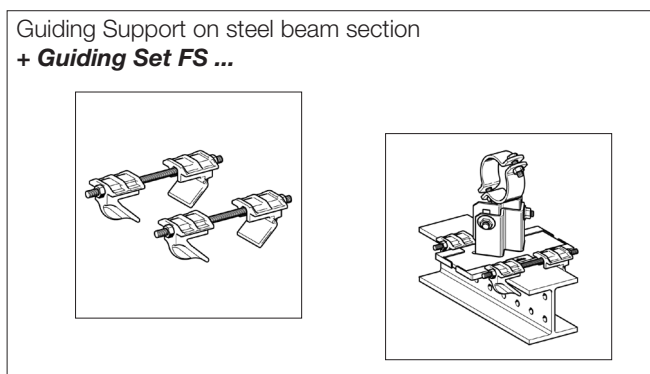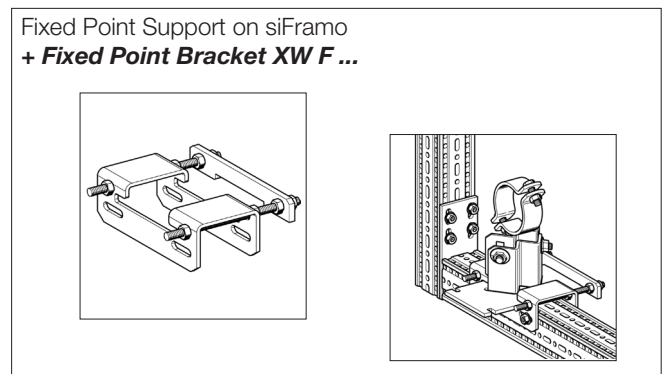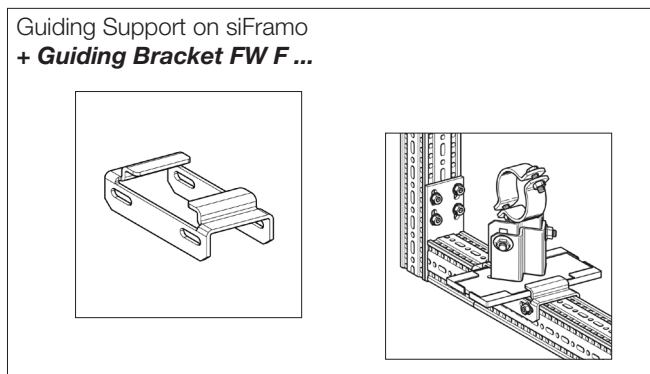

The dimension of the existing steel beam determines the required type of connection kit.
Can be installed on steel beams with flange width ≤ 300 mm and flange thickness ≤ 30 mm.

Design temperatures of pipe support components

The media temperature t_f has an influence on the system of the pipe support components. Acc. to DIN EN 13480-3 „*all components of the pipe support have to be designed based on a range of temperature from 0°C to 80°C. If the operational temperatures of the piping system are outside of this range, the corresponding values have to be specified.*“

During the design of pipe supports, components are basically assigned into 2 groups: inside and outside of insulation.


For all components being placed inside of an insulation the following values apply²:

| Kind of component | Design temperature t of the pipe support (depending on the media temperature t_f) |
|---|--|
| Straps, pipe clamps and welded components with extensive contact to the piping system | $t = t_f$ |
| Components not in contact with the piping system | $t = t_f - 20\text{ °C}$ |
| Bolts, nuts, etc. | $t = t_f - 30\text{ °C}$ |

For all components being placed outside of the insulation the following values apply³:

| Kind of component | Media temperature t_f | Design temperature t of the pipe support |
|--|-------------------------|---|
| Components in direct contact with the pipe | $t_f > 80\text{ °C}$ | $t = \frac{1}{2} \times t_f$ (min. 80°C) |
| | $t_f \leq 80\text{ °C}$ | $t = 80\text{ °C}$ |
| Bolts, nuts, etc. | $t_f > 80\text{ °C}$ | $t = \frac{1}{3} \times t_f$ (min. 80°C) |
| | $t_f \leq 80\text{ °C}$ | $t = 80\text{ °C}$ |

For clarification of the tables see the graphical illustration⁴:

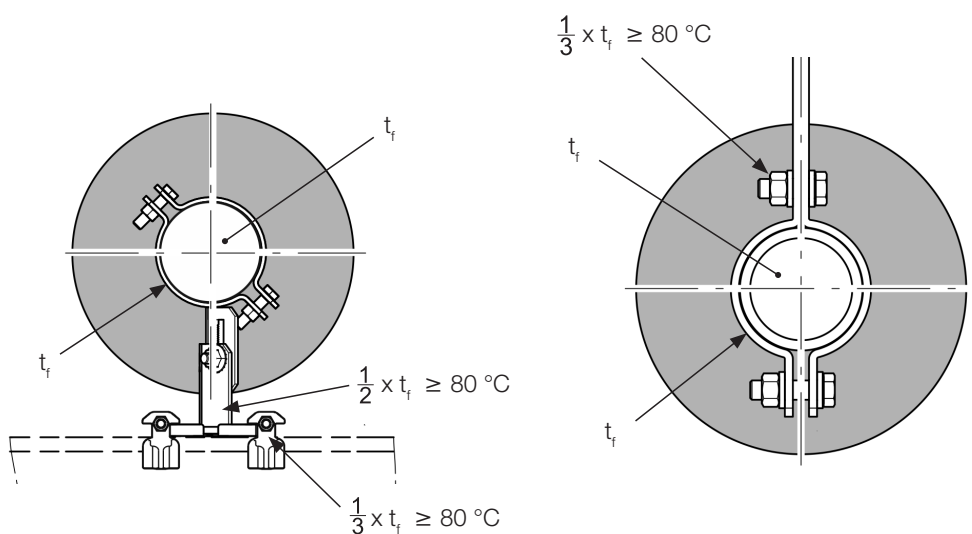

¹ Compare EN 13480-3:2014-12, Table 13.3.1

² Compare EN 13480-3:2014-12, Chapter 13.3.2.2-1


³ Compare EN 13480-3:2014-12, Table 13.3.2-2

⁴ Compare EN 13480-3:2014-12, Image 13.3.2-1

Correction values for pipe support components

The working loads of the SIKLA pipe shoes LA, LC and LD as well as for the rod hangers are valid for component temperatures up to 80°C. If components are getting warmer than 80°C in service, the stated working loads have to be added with the correction value k to reduce the working loads. Because SIKLA pipe support components are manufactured with steel grade S235JR (or higher), the appropriate correction value has to be applied.

Correction value k for S235JR depending on the temperature:

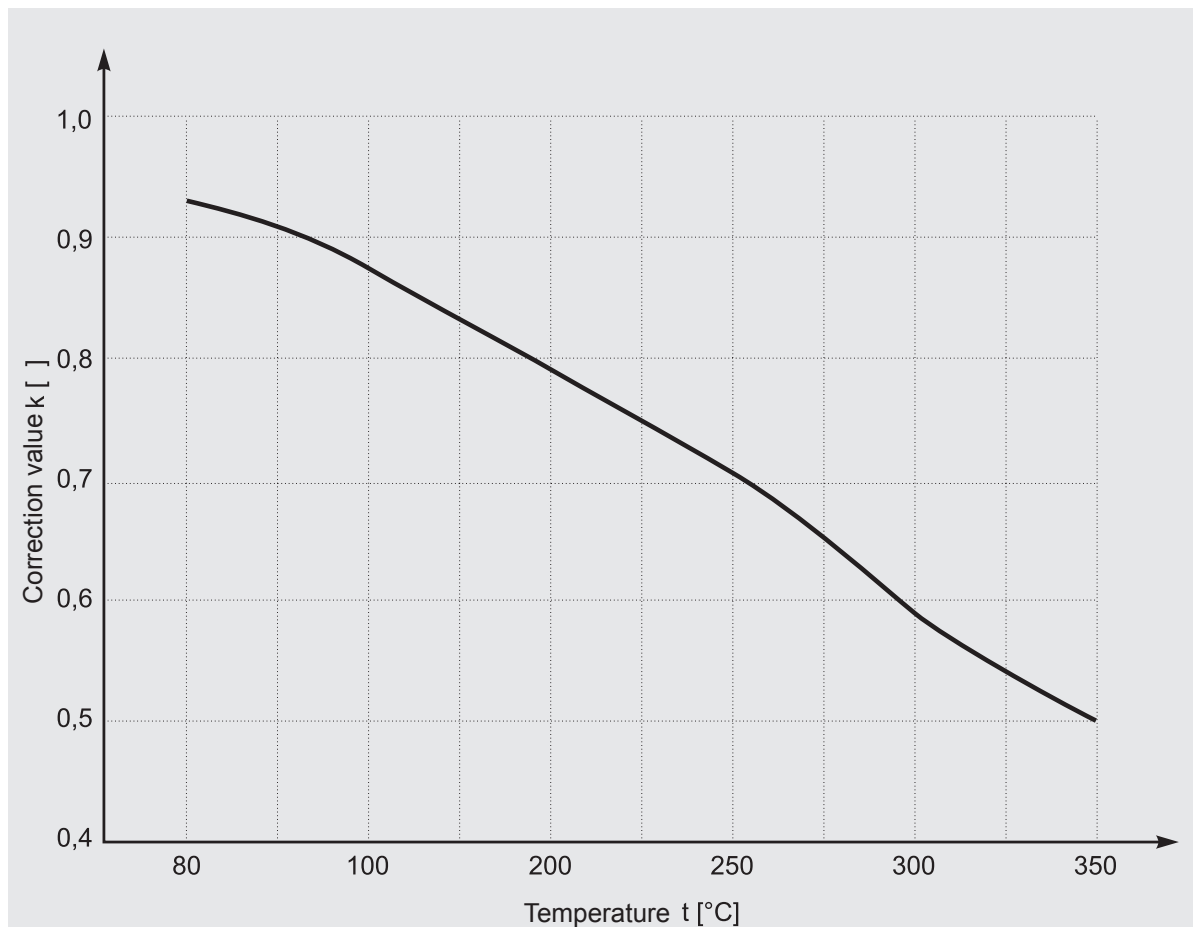

Correction values and practical application

$$F_{\text{perm}} \geq F_{\text{exist}}$$


$$(F_{\text{perm}} = F_{R,20^\circ\text{C}} \cdot k) \geq F_{\text{exist}}$$

- F_{perm} permissible load of Sikla pipe shoe at temperature t_x [°C]
- F_{exist} pipe load according to structural analysis
- $F_{R,20^\circ\text{C}}$ permissible load of Sikla pipe shoe at 20°C
- k correction value

| Temperature t [°C] | Correction value k [] |
|--------------------|------------------------|
| 80 | 0.93 |
| 100 | 0.88 |
| 200 | 0.79 |
| 250 | 0.71 |
| 300 | 0.58 |
| 350 | 0.50 |


siFramo

Beam Section TP F 80 and TP F 100

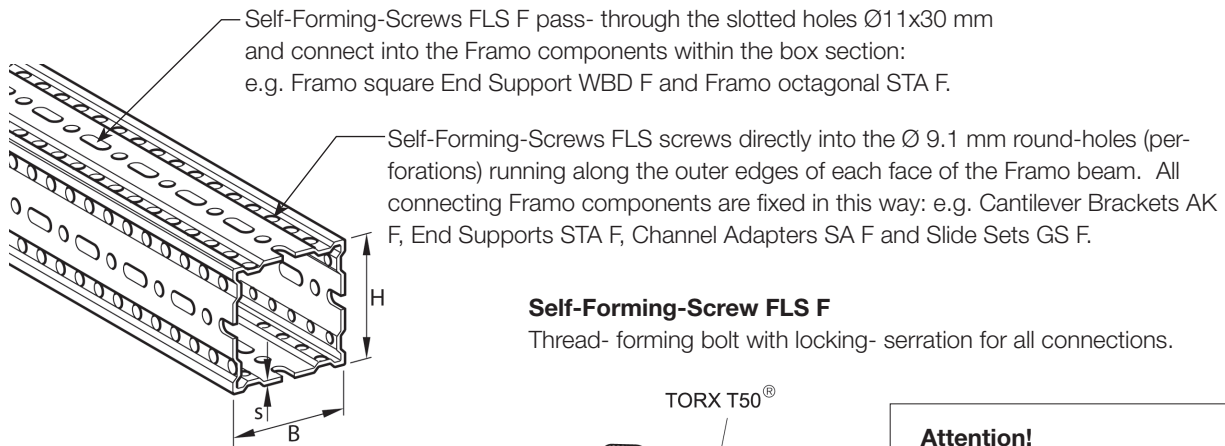

Self-Forming-Screw FLS F

Thread-forming bolt with locking-serration for all connections.




Attention!

► Max. applied torque no more than 60 Nm !

Assembly of Beam Section TP F with WBD-End Support and End Support STA F


For best performance the Self-Forming-Screw FLS F must be applied to both sides in greatest possible distance apart 2 x 2 screws opposite one another.
Distance between end of section and end-plate: ≤ 10 mm.

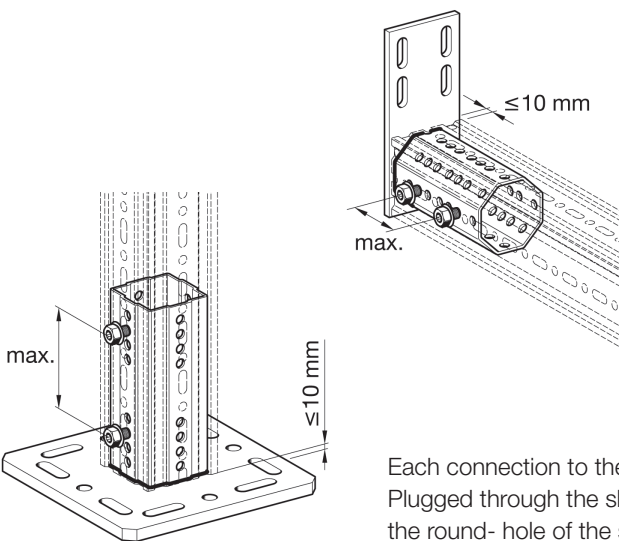

Assembly to Beam Section TP F, e.g. Cantilever Bracket AK F


Offset hole-lines allow for connection at one level without collision of bolts inside the box section for all components with end-plate (e.g. STA F, SA F).

4 Self-Forming-Screws are required to fix each end-plate!



Each connection to the section requires 4 screws!
Plugged through the slotted hole, these will screw into the round-hole of the section underneath.



Technical Data



| Description Beam Section [mm] | Description Axis | Wand- dicke s [mm] | Moment of Inertia | | Section Modulus | | Radius of Inertia | | Torsional Moment It [cm ⁴] | Cross Section A [cm ²] | Weight G [kg/m] |
|-------------------------------------|---------------------|-----------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|------------------------|------------------------|---|---|-----------------------|
| | | | I _y [cm ⁴] | I _z [cm ⁴] | W _y [cm ³] | W _z [cm ³] | i _y [cm] | i _z [cm] | | | |
| TP F 80/30 | z | 3,0 | 35,4 ^{*)} | 6,7 ^{*)} | 10,3 ^{*)} | 4,7 ^{*)} | 3,63 | 1,58 | 8,58 | 2,69 ^{*)} | 4,3 |
| TP F 80/80 | z | 3,0 | 62,5 ^{*)} | | 15,8 ^{*)} | | 3,58 | | 48,40 ^{*)} | 4,85 | 6,4 |
| TP F 100/100 | z | 4,0 | 179,8 ^{*)} | | 36,9 ^{*)} | | 4,80 | | 135,00 | 7,80 ^{*)} | 10,8 |
| TP F 100/160 | z | 4,0 | 559,4 ^{*)} | 280,3 ^{*)} | 75,5 ^{*)} | 46,2 ^{*)} | 6,16 | 4,36 | 193,00 | 14,74 ^{*)} | 14,3 |

Beam Section TP F. Steel. Hot-dipped-galvanized according to DIN EN ISO 1461 tZn o.
All structural data takes perforation into account.

*) determination of effective values by tests.

Section data Simotec Beam System 100 / 120


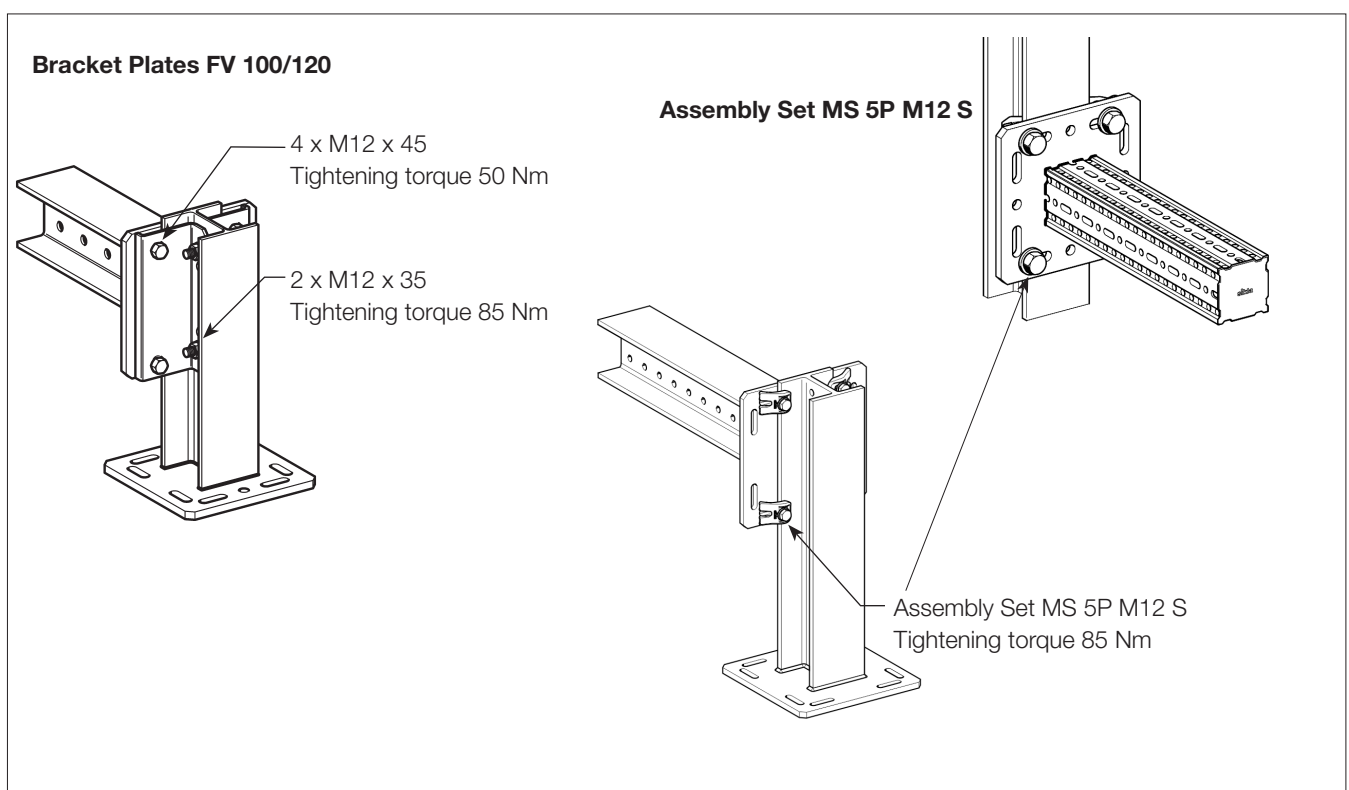
| Type | Moment of Inertia [cm ⁴] | | Section Modulus [cm ³] | | Radius of Inertia [cm] | | Torsional Moment [cm ⁴] | Cross Section [cm ²] A | Weight [kg/m] G |
|---------|--------------------------------------|------------|------------------------------------|-------------|------------------------|-------------|-------------------------------------|---------------------------------------|--------------------|
| | I_y | I_z | W_y | W_z | i_y | i_z | | | |
| H 100 | 341 | 133 | 71,0 | 26,7 | 4,14 | 2,59 | 5,15 | 19,9 | 16,40 |
| HEA 100 | 349 | 134 | 72,8 | 26,8 | 4,06 | 2,51 | 5,26 | 21,2 | 16,70 |
| H 120 | 853 | 317 | 142,0 | 52,8 | 5,13 | 3,13 | 13,66 | 32,3 | 26,50 |
| HEB 120 | 864 | 318 | 144,0 | 52,9 | 5,04 | 3,06 | 13,90 | 34,0 | 26,70 |

Remarks

HEA 100 = IPBI 100 as per DIN 1025 Part 3: 1994-03: B100; H 96; Flange 8; Web 5 (EN 53)

HEB 120 = IPB 120 as per DIN 1025 Part 2: 1995-11: B120; H120; Flange11; Web 6,5 (EN 53)

Sikla Beam Sections H 100 und H 120 are hot-dipped-galvanized as per DIN 50976 / DIN EN ISO 1461.

Tightening torque for typical connections


Connection to primary steel structure by Assembly Set P2 S and P3 S

| Description | Thread | Tightening torque [Nm] |
|--------------------------|--------|------------------------|
| Assembly Set MS 5P M12 S | M12 | 85 |
| Assembly Set MS 5P M16 S | M16 | 150 |

Use Assembly Set always into slotted hole rows (y) in 90° direction to the main axis of the structural beam (x).